

Corpay/Comdata Web Services 2.1 (Fleet Credit) Specifications & Field Definitions

Document Version 4.8
7/31/2026

Document Information & Disclaimer

The information furnished herein is proprietary and confidential and is intended for Corpay/Comdata customers only. It should not be duplicated, published, or disclosed in whole or in part without the prior written permission of Corpay.

Revision History

Date	Version	Notes	Author
12/10/2012	v. 1.6	Updated Real Time Transaction History required fields.	Josh Palmer
06/11/2013	v. 1.7	Added Card Listing request; updated the Update Card Limit request form.	Josh Palmer
07/30/2013	v. 1.8	Added MasterCard Intraday request.	Josh Palmer
08/26/2013	v. 1.9	Updated Customer Profile Limit Inquiry Request.	Steven Harris
08/19/2014	v. 2.0	Updated to reflect changes from the year 2014.	Steven Harris
09/16/2014	v. 2.1	Minor change to the Production Environment section.	Steven Harris
09/26/2014	v. 2.2	Corrected typo to MasterCard Intraday Request and Real Time Transaction History.	Steven Harris
11/17/2014	v. 2.3	Added Card Update 2 and Card Inquiry 2.	Steven Harris
01/13/2015	v. 2.4	Added One-Time Purchase Override, Recycle Card Limits, and RTTH 2.0.	Steven Harris
03/03/2015	v. 2.5	Added Available Credit Inquiry.	Steven Harris
03/31/2015	v. 2.6	Updated the Overview and Notes section for MasterCard Intraday.	Steven Harris
06/23/2015	v. 2.7	Added Real Time Transaction History 3.0.	Steven Harris
01/19/2016	v. 2.8	MasterCard Intraday and RTTH: promptedID max length changed from 6 to 16.	Steven Harris
02/19/2016	v. 2.9	Added Card Add V02.	Steven Harris
04/11/2016	v. 3.0	Added Customer Profile Listing.	Steven Harris
07/21/2016	v. 3.1	Corrected Certification Environment links.	Steven Harris
8/29/2018	v. 3.2	Added the following: • Updated production environment WSDLs • Updated Functional Overview • Updated Request Summary • Added Add Card V03 operation • Added Card Listing V02 operation • Updated Card Listing operation	Steven Harris
11/08/2018	v. 3.3	Added declineFlag, declineCode, and declineMessage to the Proprietary Intraday response record.	Steven Harris
08/31/2020	v. 3.4	Added Virtual Mastercard capability to Real Time Transaction History v3.0.	Steven Harris
01/08/2022	v. 3.5	Updated the following: • Add Vehicle ID • Add Card V02 • Inquire Card V02 • Inquire Vehicle ID • Update Card V02 • Update Vehicle ID	Nancy Brown
01/11/2022	v. 3.6	Updated Proprietary Intraday	Nancy Brown
01/18/2022	v. 3.7	Added Intraday V03 – MasterCard	Nancy Brown
03/23/2022	v. 3.8	Updated Driver ID (Add, Inquire and Update)	Nancy Brown
05/17/2022	v. 3.9	Updated Add Card V03: In the Request: • added 2 optional fields (maskCard, securityCode)	Nancy Brown Periyasamy Kamaraj

Date	Version	Notes	Author
		- marked "profileLimits" as required element and marked few sub elements as "required = Y" In the Response: - Updated the comment for cardNumber and cardSecurity Code	
09/07/2022	v. 4.0	Changed 'Card Add v03' comments for: - profileFlag Added element to 'Update Vehicle ID' Req Rrecord for: - UnitStatus	Nancy Brown Periyasamy Kamaraj
01/09/2023	v. 4.1	Changed 'Update Vehicle ID' comments for: onetimeProximityOverrideFlag New section added to show the newly added error code and messages in "Sample ResponseCodes/Messages" section.	Nancy Brown Periyasamy Kamaraj
03/14/2023	v. 4.2	Changed 'Card Add' Request: - Updated fields: "registrationExpiration": Data Type, Max Len and Comment - Updated fields: "cardExpiration": Data Type, Max Len and Comment Changed 'Card Add v02' Request: - Updated fields: "registrationExpiration": Data Type, Max Len and Comment - Updated fields: "cardExpiration": Data Type, Max Len and Comment Changed 'Card Add v03' Request: - Updated fields: "registrationExpiration": Data Type, Max Len and Comment - Updated fields: "cardExpiration": Data Type, Max Len and Comment Changed 'Card Add v03' Response: - Updated Response fields: "registrationExpiration": Data Type, Max Len and Comment - Updated Request fields: "cardExpiration": Data Type, Max Len and Comment Changed 'Card Update' Request: - Updated Response fields: "registrationExpiration": Data Type, Max Len and Comment - Updated Request fields: "cardExpiration": Data Type, Req, Max Len and Comment Changed 'Card Update v2' Request: - Updated Response fields: "registrationExpiration": Data Type, Max Len and Comment - Updated Request fields: "cardExpiration": Data Type, Req, Max Len and Comment Changed 'Proprietary Intraday' New fields added to Response: - Latitude and Longitude Changed 'Intraday v03 - MasterCard' Response: - New fields: Latitude and Longitude - Changed vechicleNumber fields: Max Len and Comment	

Date	Version	Notes	Author
04/5/2023	v. 4.3	Available Credit Inquiry has been updated. The unbilledAmount and preAuthAmount elements have been added to the Response Record.	David Malone
06/12/2023	v. 4.4	Added the latitude and longitude attributes to the Response Record for Mastercard Intraday	Nancy Brown Periyasamy Kamaraj
07/10/2024	v. 4.5	Removed the card number attribute and added the card token and misc3 attributes to the Response Record for Mastercard Intraday V04.	Hukumchand Pal
07/10/2024	v. 4.5	Removed the card number attribute and added the card token attribute to the Response Record for Proprietary Intraday V02.	Hukumchand Pal
07/23/2024	v. 4.6	Created new version - V02 for Inquire Vehicle Id and added the below attributes to the Response Record for Inquire Vehicle Id V02 are: - miscData3, tankCapacity, profileId, deviceId, maxDailyPurchase, lastTxnLocation, lastTxnDate, lastTxnTime, lastPersonUsingCard, unitStaus.	Hukumchand Pal
07/23/2024	v. 4.6	Created new version - V02 for Add Vehicle Id and added the below attributes to the Request for Add Vehicle Id V02 API by updating the data type, length, required and comments. Added Attributes are: - miscData3, tankCapacity, profileId and deviceId.	Hukumchand Pal
07/23/2024	v. 4.6	Created new version - V02 for Update Vehicle Id and added the below attributes to the Request for Update Vehicle Id V02 API by updating the data type, length, required and comments. Added Attributes are: - miscData3, tankCapacity, profileId and deviceId.	Hukumchand Pal
06/12/2026	v.4.7	For Bridgehaul, created an api for factoringUserSignup	Gayatri S
06/12/2026	v.4.7	For Bridgehaul, created an api for Registering a card	Ismail Naik
06/12/2026	v.4.7	For Bridgehaul, created an api for Balance-to-Credit Transfer API	Parveenu shaikh
06/12/2026	v.4.7	For Bridgehaul, created an api for Factoring User Dashboard API	Renuka

Date	Version	Notes	Author
06/12/2026	v.4.7	For Bridgehaul, created an api for Factoring User Status API	Raveena
07/08/2026	v. 4.8	API Update The following existing APIs have been updated to support card alert and notification preferences: • Add Card • Add Card V02 • Add Card V03 • Update Card • Update Card V02 NEW API: Card Inquiry V03 • Card Inquiry V03 A new optional request attribute, alertsPreferences, has been added to configure card alert settings, including: • Email alerts • Mobile alerts The alertsPreferences attribute is optional. If it is not provided, the existing behavior remains unchanged.	Suresh Kanthan
07/08/2026	v. 4.8	New API: Move Card A new API, Move Card, has been introduced to support moving a card from one customer to another. API: • Move Card The Move Card API allows you to transfer a card that is currently associated with one customer to a different customer. After a successful request, the card will be reassigned from the existing customer to the specified target customer.	Suresh Kanthan

Contents

WEB SERVICES 2.1 OVERVIEW 9

COMDATA WEB SERVICES 2.1 SECURITY 10

COMDATA WEB SERVICES 2.1 ENDPOINT AND WSDL..... 10

COMDATA WEB SERVICES 2.1 GENERAL REQUIREMENTS..... 11

COMDATA WEB SERVICES 2.1 FUNCTIONAL OVERVIEW..... 12

ADD CARD..... 13

ADD CARD V02..... 16

ADD CARD V03..... 19

AVAILABLE CREDIT INQUIRY 25

ADD DRIVER ID..... 27

ADD VEHICLE ID 28

ADD VEHICLE ID V02 29

DELETE DRIVER ID..... 31

DELETE VEHICLE ID 32

CARD INQUIRY 33

CARD INQUIRY 2..... 35

CARD INQUIRY 3..... 37

CARD UPDATE..... 40

CARD UPDATE 2 42

CUSTOMER PROFILE LIMIT INQUIRY 45

DRIVER ID INQUIRY 48

VEHICLE ID INQUIRY..... 50

VEHICLE ID INQUIRY V02 52

UPDATE CUSTOMER PROFILE LIMIT 54

CARD SECURITY CODE INQUIRY 55


CARD PROFILE LIMIT INQUIRY	56
CUSTOMER PROFILE LISTING.....	58
UPDATE CARD PROFILE LIMIT	60
UPDATE DRIVER ID.....	61
UPDATE VEHICLE ID	62
UPDATE VEHICLE ID V02	65
REAL TIME TRANSACTION HISTORY.....	68
REAL TIME TRANSACTION HISTORY 2	71
REAL TIME TRANSACTION HISTORY 3	75
RECYCLE CARD LIMITS.....	78
MASTERCARD INTRADAY	79
ONE-TIME PURCHASE OVERRIDE.....	83
CARD LISTING	84
CARD LISTNG V02	87
CUSTOMER ID LISTING.....	92
PROPRIETARY INTRADAY	94
PROPRIETARY V02 INTRADAY.....	98
INTRADAY V03 - MASTERCARD	102
INTRADAY V04 - MASTERCARD	107
FACTORING - USERSIGNUP	112
FACTORING - REGISTERCARD	113
BALANCE – TOCREDIT-TRNASFER	115
FACTORING USER DASHBOARD	115
FACTORING USER CARD STATUS	117
VALIDATE FACTORING CARD	118
MOVE CARD	119

APPENDIX A. - COMDATA WEB SERVICES 2.1 SAMPLE REQUEST/RESPONSE..... 120

APPENDIX B. – POSSIBLE CARD BLOCK REASON CODES AND DESCRIPTIONS121

Web Services 2.1 Overview

Comdata Web Services Architecture

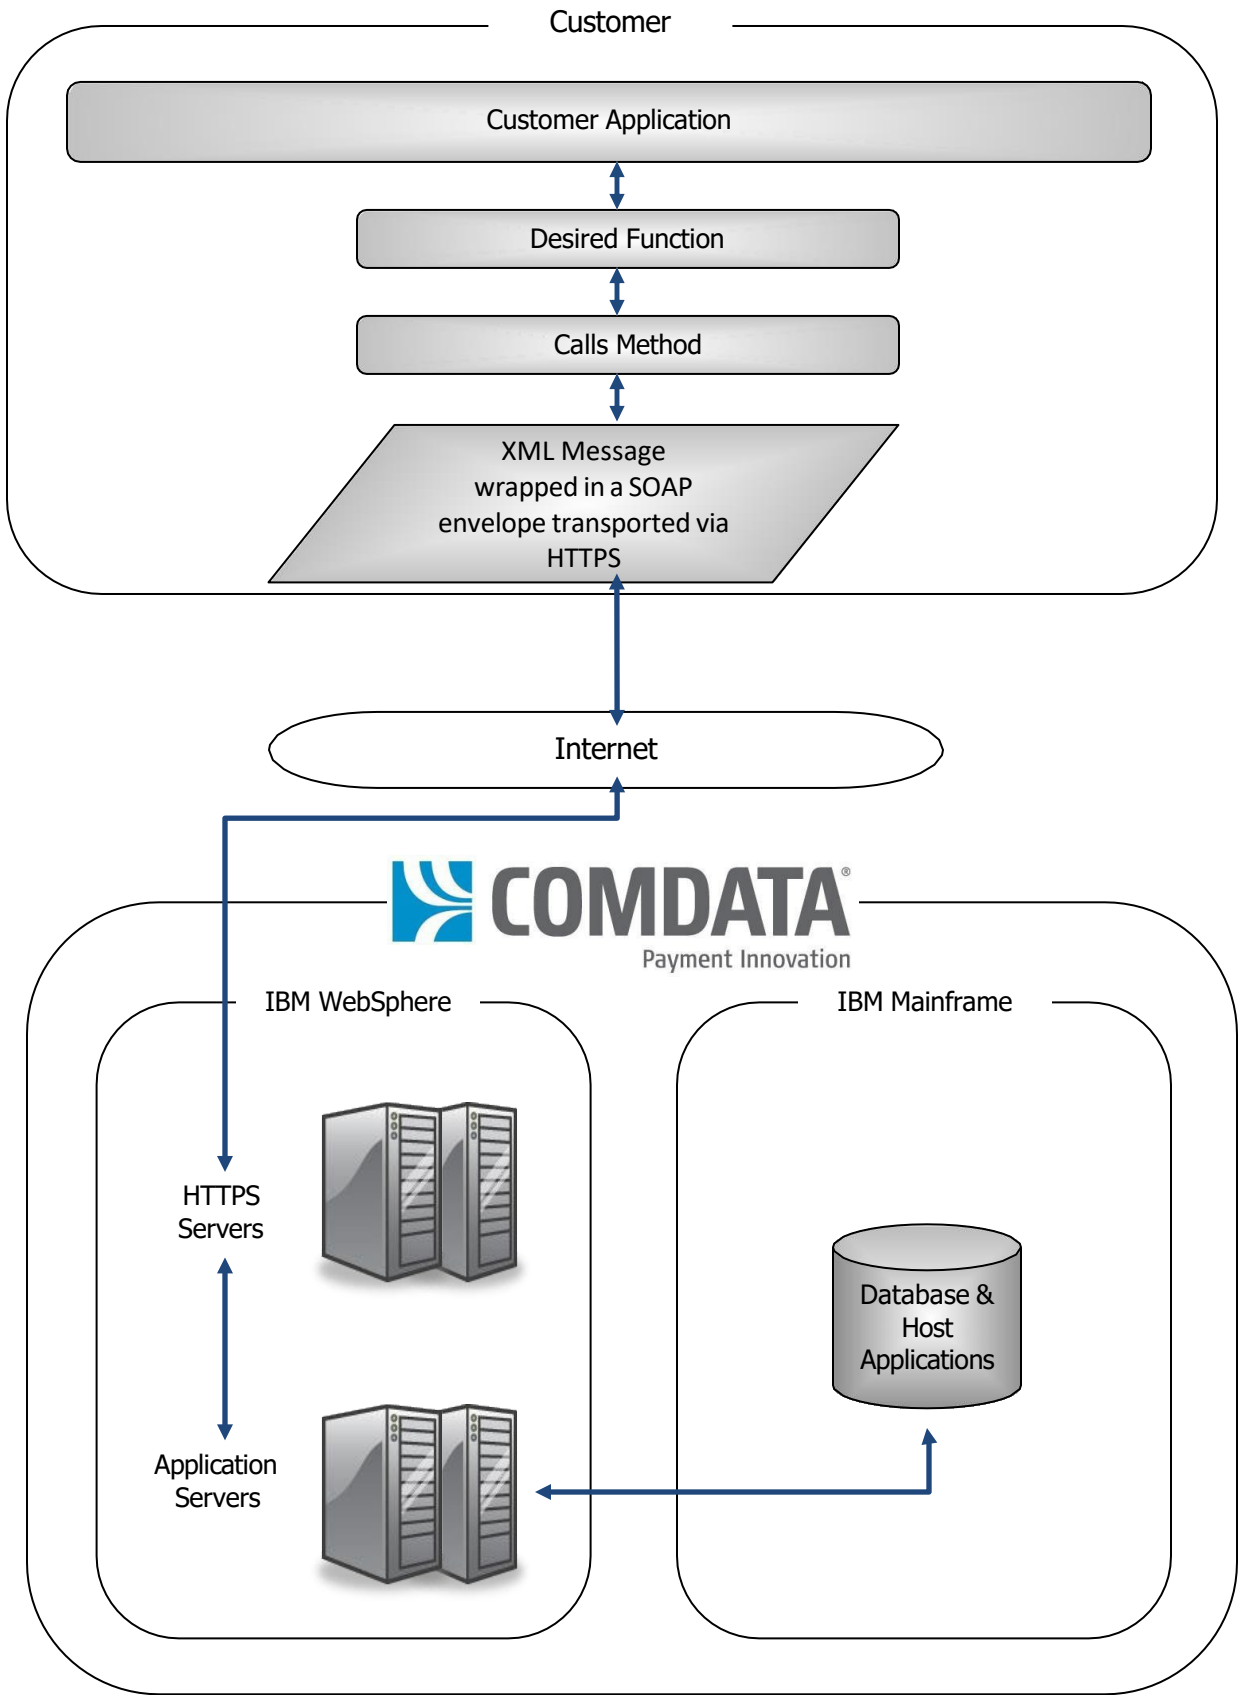

Comdata Web Services 2.1 Security

Comdata's web services 2.1 platform is protected by multiple layers of security to ensure that only authorized users utilize these services. A failure at any of these levels will deny access.

- Secure Socket Layer (SSL) Data Transport – All data must be transported utilizing Secure Hyper Text Transport Protocol (HTTPS) which relies on the Secure Socket Layer (SSL) data communications protocol. The Public Key Encryption using Verisign® public 256-bit certificate.
- WS – Security Base Authentication – WS-Security is utilized to authenticate access to Comdata's web services. Comdata will provide authentication credentials, Username and Password values, which must be included in the WS-Security UsernameToken portion of the SOAP header.
- Specific data access rules and functional capabilities are defined and maintained within each web service requestor's profile. The profile is created as part of the initial setup by Comdata associates and can be maintained as needed upon request.

Comdata Web Services 2.1 Endpoint and WSDL

Certification Environment

Endpoint: <https://w6cert.icconnectdata.com/FleetCreditWS/services/FleetCreditWS0200>

WSDL: <https://w6cert.icconnectdata.com/FleetCreditWS/services/FleetCreditWS0200/wsd/FleetCreditWS0200.wsdl>

Production Environment

Endpoint: <https://api.icconnectdata.com/FleetCreditWS/services/FleetCreditWS0200>

WSDL: <https://api.icconnectdata.com/FleetCreditWS/services/FleetCreditWS0200/wsd/FleetCreditWS0200.wsdl>

Comdata Web Services 2.1 General Requirements

- All alphabetical characters in element values should be in upper case.
- The SOAP implementation in Websphere 8.5 is compliant with the WS-I Basic Profile 1.0, which requires that all application-specific elements in the body must be namespace qualified to avoid name collision.
- In the event that a host response code/response message is not descriptive enough, please contact your Comdata Representative for a greater explanation.
- SOAP Fault Elements are used to communicate fault error and/or fault status information.

Comdata Web Services 2.1 Functional Overview

Card Based Functions		Relevant Card Type		
Function	Web Service Method	Comdata Proprietary Cards	Comdata MasterCard (physical & ghost)	Comdata Virtual MasterCard
Add Card	AddCardRequest		✓	
Add Card 2	AddCardRequestV02		✓	
Add Card 3	AddCardRequestV03		✓	
Available Credit Inquiry	AvailableCreditInquiry	✓	✓	✓
Add Driver ID	DriverIdAddRequest		✓	
Add Vehicle ID	VehicleIdAddRequest		✓	
Delete Driver ID	DriverIdDeleteRequest		✓	
Delete Vehicle ID	VehicleIdDeleteRequest		✓	
Card Inquiry	CardInquiry		✓	
Card Inquiry 2	InquireCardV02		✓	
Card Update	UpdateCard		✓	
Card Update 2	UpdateCardV02		✓	
Card Profile Limit Inquiry	CustomerProfileLimitInquiryRequest		✓	
Card Security Code Inquiry	CardSecurityCodeInquiryRequest		✓	
Card Profile Limit Inquiry	CardProfileLimitInquiryRequest		✓	
Customer Profile Listing	CustomerProfileListing		✓	
Driver ID Inquiry Request	DriverIdInquireRequest		✓	
Vehicle ID Inquiry Request	VehicleIdInquireRequest		✓	
Update Card Profile Limit	CardProfileLimitUpdateRequest		✓	
Update Customer Profile Limit	CustomerProfileLimitUpdateRequest		✓	
Update Driver ID	DriverIdUpdateRequest		✓	
Update Vehicle ID	VehicleIdUpdateRequest		✓	
Real Time Transaction History	RTTransactionRequest		✓	✓
Real Time Transaction History 2	RTTransactionRequestV02		✓	✓
Rela Time Transaction History 3	RTTransactionRequestV03		✓	✓
Recycle Card Limits	RecycleCardLimitRequest		✓	
MasterCard Intraday Request	IntradayRequest		✓	✓
One-Time Purchase Override	OneTimePurchaseOverrideRequest		✓	
Card Listing	CardListingRequest		✓	
Card Listing V02	CardListingV02		✓	
Customer ID Listing	CustIDListingRequest	✓	✓	✓
Proprietary Intraday	ProprietaryIntradayRequest	✓		
Proprietary Intraday 2	ProprietaryIntradayRequestV02	✓		
Intraday V03 Mastercard	IntradayRequestV03		✓	
Intraday V04 Mastercard	IntradayRequestV04		✓	

Add Card

The Add Card request is used to order a card via a web service mirroring PS14 functionality. The Card Add request requires the following information: the requested card limit, card expiration date, and the card status.

Function:	Add Card
Web Service Method:	cardAdd
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Add

Element Name	Data Type	Req	Max Len	Comment / Example Value
<AddCardRequest>				
<cardDetails>				
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
cardStatus	xsd:string	Y	1	A = active; B = blocked; C = clear; F = fraud; L = lost; S = stolen
profileFlag	xsd:string	N	1	Y (yes) or N (no)
profileValue	xsd:string	Y	3	3-digit number identifying the profile group for the cardholder, if applicable
cardFirstName	xsd:string	Y	15	Value assigned to the First Name field
cardLastName	xsd:string	Y	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	N	20	Driver's License Number (US or Canadian)
driverLicenseState	xsd:string	N	2	Use 2-letter state abbreviation (US) or province abbreviation (Canada)
tripNumber	xsd:string	N	10	For Comdata proprietary (fleet) cards only; this number uniquely identifies a trip
vehicleNumber	xsd:string	N	6	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 6
employeeNumber	xsd:string	Y	16	Employee number assigned to this card
vehicleVINNumber	xsd:string	N	30	Vehicle's VIN number
vehicleDescription	xsd:string	N	30	Brief, free-form description of a vehicle
vehicleLicensePlateNumber	xsd:string	N	15	Vehicle license plate number

Element Name	Data Type	Req	Max Len	Comment / Example Value
registrationExpiration	xsd:string	N	10	Vehicle registration expiration date – YYYY-MM-DD E.g., 2025-03-15
miscellaneous1	xsd:string	N	15	Miscellaneous storage field one
miscellaneous2	xsd:string	N	15	Miscellaneous storage field two
cardExpiration	xsd:string	N	10	Card expiration date - – YYYY-MM-DD E.g., 2025-03-15
<mailingDetails>				
mailMethod	xsd:string	Y	1	<u>Numbers 0-9, no 2 option</u> 1 – UPS Next Day Air 4 – FEDEX Priority 3 – UPS 2 nd Day 6 – FEDEX Two Day 5 – UPS Ground 7 – FEDEX Ground 8 – USPS 9 – FEDEX International 0 – UPS Worldwide Expedited
mailName	xsd:string	Y	30	Company Name
mailAttention To	xsd:string	Y	30	Attention to Person
mailAddress1	xsd:string	Y	30	Mailing Address Line 1
mailAddress2	xsd:string	Y	30	Mailing Address Line 2
mailCity	xsd:string	Y	20	Mailing City
mailState	xsd:string	Y	2	2-letter abbreviation for the state (US) or province (Canada)
mailZip	xsd:string	Y	10	Mailing Zip Code
</mailingDetails>				
maskCardFlag	xsd:string	N	1	Y (yes) or N (no)
<alertsPreferences>				
emailAlertActive	xsd:string	N	1	Y (yes) or N (no)
emailAddress	xsd:string	N	50	Email Address (Email field is required when emailAlertActive flag is Y)
smsAlertActive	xsd:string	N	1	Y (yes) or N (no)
smsPhoneNumber	xsd:string	N	10	Mobile Number should 10 digits (smsPhoneNumber is required when smsAlertActive flag is Y)
</alertsPreferences>				
</AddCardRequest>				

Response Record – Card Add

<AddCardResponse>			
<response>			
Element Name	Data Type	Max Len	Comment / Example Value
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)

discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	9	Customer-assigned value returned in the response record
cardNumber	xsd:string	16	New card number if created (number masked if maskCardFlag flagged "Y" in the request)
employeeNumber	xsd:string	16	Employee number assigned to this card
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: CARD ADDED

</response>
</AddCardResponse>

Add Card V02

The Add Card V02 request is used to order a card via a web service. The Card Add request requires the following information: the requested card limit, card expiration date, and the card status.

Function:	Add Card
Web Service Method:	AddCardRequestV02
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Add V02

Element Name	Data Type	Req	Max Len	Comment / Example Value
<AddCardRequestV02>				
<cardDetails>				
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
cardStatus	xsd:string	Y	1	A = active; B = blocked; C = clear; F = fraud; L = lost; S = stolen
profileFlag	xsd:string	N	1	Y (yes) or N (no)
profileValue	xsd:string	Y	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	N	30	not used for add
cardFirstName	xsd:string	Y	15	Value assigned to the First Name field
cardLastName	xsd:string	Y	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	N	20	Driver's License Number (US or Canadian)
driverLicenseState	xsd:string	N	2	Use 2-letter state abbreviation (US) or province abbreviation (Canada)
tripNumber	xsd:string	N	10	This number identifies a trip
vehicleNumber	xsd:string	N	10	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 10
employeeNumber	xsd:string	Y	16	Employee number assigned to this card
vehicleVINNumber	xsd:string	N	30	Vehicle's VIN number
vehicleDescription	xsd:string	N	30	Brief, free-form description of a vehicle

Element Name	Data Type	Req	Max Len	Comment / Example Value
vehicleLicensePlateNumber	xsd:string	N	15	Vehicle license plate number
registrationExpiration	xsd:string	N	10	Vehicle registration expiration date - -- YYYY-MM-DD E.g., 2025-03-15
miscellaneous1	xsd:string	N	15	Miscellaneous storage field one
miscellaneous2	xsd:string	N	15	Miscellaneous storage field two
cardExpiration	xsd:string	N	10	Card expiration date – YYYY-MM-DD E.g., 2025-03-15
cardToken	xsd:string	N	10	not used for add
cardBlockReasonCode	xsd:string	N	4	not used for add
cardBlockReasonDesc	xsd:string	N	60	not used for add
cardGroupId	xsd:string	N	16	Card group id assigned to this card
</cardDetails>				
<mailingDetails>				
mailMethod	xsd:string	N	1	Numbers 0-9, no 2 option 1 – UPS Next Day Air 4 – FEDEX Priority 3 – UPS 2 nd Day 6 – FEDEX Two Day 5 – UPS Ground 7 – FEDEX Ground 8 – USPS 9 – FEDEX International 0 – UPS Worldwide Expedited
mailName	xsd:string	N	30	Company Name
mailAttentionTo	xsd:string	N	30	Attention to Person
mailAddress1	xsd:string	N	30	Mailing Address Line 1
mailAddress2	xsd:string	N	30	Mailing Address Line 2
mailCity	xsd:string	N	20	Mailing City
mailState	xsd:string	N	2	2-letter abbreviation for the state (US) or province (Canada)
mailZip	xsd:string	N	10	Mailing Zip Code
</mailingDetails>				
maskCardFlag	xsd:string	N	1	Y (yes) or N (no)
<alertsPreferences>				
emailAlertActive	xsd:string	N	1	Y (yes) or N (no)
emailAddress	xsd:string	N	50	Email Address (Email field is required when emailAlertActive flag is Y)
smsAlertActive	xsd:string	N	1	Y (yes) or N (no)
smsPhoneNumber	xsd:string	N	10	Mobile Number should 10 digits (smsPhoneNumber is required when smsAlertActive flag is Y)
</alertsPreferences>				
</AddCardRequestV02>				

Response Record – Card Add V02

Element Name	Data Type	Max Len	Comment / Example Value
<AddCardResponse>			
<response>			

accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	9	Customer-assigned value returned in the response record
cardNumber	xsd:string	16	New card number if created (number masked if maskCardFlag flagged "Y" in the request)
employeeNumber	xsd:string	16	Employee number assigned to this card
responseCode	xsd:string	5	0=Success Anything Else=Error

Element Name	Data Type	Max Len	Comment / Example Value
responseDescription	xsd:string	80	If the request succeeded, the message should be: CARD ADDED
</response>			
</AddCardResponse>			

Add Card V03

The Add Card V03 request is used to order a card via a web service while combining the following features:

- Create card
- Set Customer Profile Limits
- Return card details and limits along with security code

The Card Add request requires the following information:

- Requested card limits
- Card expiration date
- Card status

This is a specialized card add operation that operation only with the following card settings:

- Cycle type “T” (never reset)
- Off company standards/profile (profileFlag = “N”)

Attempting to create cards outside of these settings will result in an input validation error.

Function:	Add Card V03
Web Service Method:	AddCardRequestV03
Applicable Card Type:	Comdata MasterCards (physical & ghost) of Cycle T off company standards
Other Notes:	

Request Record – Card Add V03

Element Name	Data Type	Req	Max Len	Comment / Example Value
<AddCardRequestV03>				
<cardDetails>				
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response Record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response Record
cardStatus	xsd:string	Y	1	A = active; B = blocked; C = clear; F = fraud; L = lost; S = stolen
profileFlag	xsd:string	N	1	Must be N for off company standards.

Element Name	Data Type	Req	Max Len	Comment / Example Value
profileValue	xsd:string	Y	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	N	30	Not used
cardFirstName	xsd:string	Y	15	Value assigned to the First Name field
cardLastName	xsd:string	Y	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	N	20	Driver's License Number (US or Canadian)
driverLicenseState	xsd:string	N	2	Use 2-letter state abbreviation (US) or province abbreviation (Canada)
tripNumber	xsd:string	N	10	Unique identifier for a trip.
vehicleNumber	xsd:string	N	6	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 6
employeeNumber	xsd:string	Y	16	Employee number assigned to this card
vehicleVINNumber	xsd:string	N	30	Vehicle's VIN (Vehicle Identification Number)
vehicleDescription	xsd:string	N	30	Brief, free-form description of a vehicle
vehicleLicensePlateNumber	xsd:string	N	15	Vehicle license plate number
registrationExpiration	xsd:string	N	10	Vehicle registration expiration date: – YYYY-MM-DD E.g., 2025-03-15
miscellaneous1	xsd:string	N	15	Miscellaneous storage field one
miscellaneous2	xsd:string	N	15	Miscellaneous storage field two
cardExpiration	xsd:string	N	10	Card expiration date: – YYYY-MM-DD E.g., 2025-03-15
cardToken	xsd:string	N	10	Not applicable field
cardBlockReasonCode	xsd:string	N	4	Not applicable field
cardBlockReasonDesc	xsd:string	N	60	Not applicable field
cardGroupId	xsd:string	N	16	Card Group ID assigned to this card
maskCard	xsd:boolean	N	1	true or false. The card number will be marked in the response if 'true'.
securityCode	xsd:boolean	N	1	true or false. The security code (CVC2) will be returned in the response if 'true'.
</cardDetails>				
<mailingDetails>				
mailMethod	xsd:string	N	1	<u>Numbers 0-9, no 2 option</u> 1 – UPS Next Day Air 4 – FEDEX Priority 3 – UPS 2 nd Day 6 – FEDEX Two Day 5 – UPS Ground 7 – FEDEX Ground 8 – USPS 9 – FEDEX International 0 – UPS Worldwide Expedited
mailName	xsd:string	N	30	Company Name
mailAttention To	xsd:string	N	30	Attention to Person
mailAddress1	xsd:string	N	30	Mailing Address Line 1
mailAddress2	xsd:string	N	30	Mailing Address Line 2
mailCity	xsd:string	N	20	Mailing City

Element Name	Data Type	Req	Max Len	Comment / Example Value
mailState	xsd:string	N	2	2-letter abbreviation for the state (US) or province (Canada)
MailZip	xsd:string	N	10	Mailing Zip Code
</mailingDetails>				
<profileLimits> Required				
openCloseFlag	xsd:string	N	1	O = Open, C = Close
productAvailableFlag	xsd:string	N	1	Y = Yes, N or blank = No
transactionDollarLimit	xsd:decimal	Y	10	Spending limit per transaction
transactionQuantityLimit	xsd:int	N	8	Limit the overall number of transactions allowed on the card.
dailyDollarLimit	xsd:decimal	Y	10	Limit the daily spending limit allowed on the card.
dailyTransactionLimit	xsd:limit	Y	6	Limit the daily number of transaction allowed on the card.
dailyQuantityLimit	xsd:int	N	8	Limit the daily amount of spending on the card.
cycleDollarLimit	xsd:decimal	Y	10	Cycle card spending limit.
cycleTransactionLimit	xsd:int	Y	6	Limit the number of transactions allowed in the card's cycle.
cycleQuantityLimit	xsd:int	N	8	Limit the spending amount allowed in the card's cycle.
cycleType	xsd:string	Y	1	Must be "T", never reset.
cycleDay	xsd:string	N	7	Values M=01 – 31, W=01000000 (Tuesday Reset), T - None
</profileLimits>				
<alertsPreferences>				
emailAlertActive	xsd:string	N	1	Y (yes) or N (no)
emailAddress	xsd:string	N	50	Email Address (Email field is required when emailAlertActive flag is Y)
smsAlertActive	xsd:string	N	1	Y (yes) or N (no)
smsPhoneNumber	xsd:string	N	10	Mobile Number should 10 digits (smsPhoneNumber is required when smsAlertActive flag is Y)
</alertsPreferences>				
</AddCardRequestV03>				

Response Record – Card Add V03

Element Name	Data Type	Max Len	Comment / Example Value
<AddCardResponseV03>			
cardNumber	xsd:string	16	Full 16-digit Comdata MasterCard number. This will be masked if the request contains "maskCard = true".
cardSecurityCode	xsd:string		Card security code. This will be returned only if the request contains "securityCode = true".
<cardDetails>			
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)

discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record
cardStatus	xsd:string	1	A = active; B = blocked; C = clear
profileFlag	xsd:string	1	Y for company standards. In this case, profile number (profileValue) field to be entered and 'profile limits' will be auto-populated N = off company standards

Element Name	Data Type	Max Len	Comment / Example Value
profileValue	xsd:string	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	30	Additional information describing the profile group
cardFirstName	xsd:string	15	Value assigned to the First Name field
cardLastName	xsd:string	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	20	Driver License Number assigned to card
driverLicenseState	xsd:string	2	Use the two-letter state (US) or province (Canada) abbreviation
tripNumber	xsd:string	10	Comdata proprietary (fleet) cards only
vehicleNumber	xsd:string	17	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 6
employeeNumber	xsd:string	16	Employee Number assigned to card
vehicleVINNumber	xsd:string	30	Vehicle's VIN (Vehicle Identification Number)
vehicleDescription	xsd:string	30	Brief, free-form description of a vehicle
vehicleLicensePlateNumber	xsd:string	15	Vehicle license plate number
registrationExpiration	xsd:string	10	Vehicle registration expiration date: – YYYY-MM-DD E.g., 2025-03-15
miscellaneous1	xsd:string	15	Customer-specific field
miscellaneous2	xsd:string	15	Customer-specific field
cardExpiration	xsd:string	10	Card expiration date: – YYYY-MM-DD E.g., 2025-03-15
cardToken	xsd:string	10	Card token for the card number
cardBlockReasonCode	xsd:string	4	The block reason code if card is blocked. See cardBlockReasonDesc.
cardBlockReasonDesc	xsd:string	60	If the card is blocked, a description of why the card is blocked. See Appendix A for more details.
cardGroupId	xsd:string	16	Card group ID assigned to this card
</cardDetails>			
<amountLimits>			
dailyAmountLimit	xsd:decimal	10	Daily card spending limit
dailyAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the day
dailyAmountLimitHold	xsd:decimal	10	Amount authorized on the card but not yet posted for the day
dailyAmountLimitAvailable	xsd:decimal	10	Amount of daily spend limit remaining after posted and authorized transactions
dailyTxnLimit	xsd:int	6	Daily card transaction limit
dailyTxnLimitUsed	xsd:int	6	Number of transactions posted to the card for the day
dailyTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the day
dailyTxnLimitAvailable	xsd:int	6	Number of daily transactions remaining after posted and authorized transactions
cycleAmountLimit	xsd:decimal	10	Cycle card spending limit
cycleAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the cycle
cycleAmountLimitHold	xsd:decimal	10	Amount authorized for the card but not yet posted for the cycle
cycleAmountLimitAvailable	xsd:decimal	10	Amount of cycle spending limit remaining after posted and authorized transactions

Element Name	Data Type	Max Len	Comment / Example Value
cycleTxnLimit	xsd:int	6	Cycle card transaction limit
cycleTxnLimitUsed	xsd:int	6	Number of card transactions posted for the cycle
cycleTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the cycle
cycleTxnLimitAvailable	xsd:int	6	Number of cycle transactions remaining after posted and authorized transactions
</amountLimits>			
<mailingDetails>			
mailMethod	xsd:string	1	Method of mailing
mailName	xsd:string	30	Receiver name
mailAttention To	xsd:string	30	Attention line
mailAddress1	xsd:string	30	Address line 1
mailAddress2	xsd:string	30	Address line 2
mailCity	xsd:string	20	City
mailState	xsd:string	2	State abbreviation
mailZip	xsd:string	10	Zip code
mailCountry	xsd:string	3	Country Code
</mailingDetails>			
</AddCardResponseV03>			

Available Credit Inquiry

The Available Credit Inquiry request checks the credit limits and available balance for an Account Code.

Function:	AvailableCreditInquiry
Web Service Method:	availableCreditInquiry
Applicable Card Type:	☐ Comdata Proprietary Cards ☐ Comdata MasterCard (physical & ghost) ☐ Comdata Virtual MasterCard
Other Notes:	You must issue the request with one or more account codes. The available limit for the account can be calculated as creditLimit – accountBalance.

Request Record – Available Credit Inquiry

<AvailableCreditInquiry>				
<AvailableCreditInquiryRequest>				
<accountCodes>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	1 or more 5-digit alphanumeric account codes *Need at least one account code but no more than 10.
</accountCodes>				
activeAccountsOnly	xsd:boolean	N	n/a	True or false, default is false.
</AvailableCreditInquiryRequest>				
</AvailableCreditInquiry>				

Response Record – Available Credit Inquiry

<AvailableCreditInquiryResponse>			
<ArrayOfAvailableCreditInquiryRecords>			
<AvailableCreditInquiryRecord>			
Element Name	Data Type	Max Len	Comment / Example Value
accountCode	xsd:string	5	5-digit alphanumeric account code
accountStatus	xsd:string	1	A=active B=blocked D=Deleted
creditLimit	xsd:string	12	999999999.99
accountBalance	Xsd:string	12	999999999.99
lastDepositAmount	xsd:string	12	999999999.99
lastDepositDate	xsd:string	5	MM/DD
preAuthAmount	xsd:string	12	999999999.99
unbilledAmount	xsd:string	12	999999999.99

responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicate errors
responseDescription	xsd:string	80	Description of response code for the individual account
</AvailableCreditInquiryRecord>			
</ArrayOfAvailableCreditInquiryRecords>			
Element Name	Data Type	Max Len	Comment/Example Value
responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicates errors
responseDescription	xsd:string	80	Description of response code
</AvailableCreditInquiryResponse>			

Add Driver ID

The Add Driver ID request is used to add a new driver to a driver pool. This request mirrors the Add Driver ID function in the PS14 batch file process.

Function:	Add Driver ID
Web Service Method:	addDriverId
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Add Driver ID

<DriverIdAddRequest>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
driverID	xsd:string	Y	16	Numeric driver ID of 6 digits; the field permits ≤ 16 digits
firstName	xsd:string	N	15	First name or other identifier assigned to this field; it is recommended you enter some information
lastName	xsd:string	N	20	Last name or other identifier assigned to this field; it is recommended you enter some information
driverLicNbr	xsd:string	N	20	US or Canadian driver's license number
driverLicState	xsd:string	N	2	2-letter state abbreviation (US) or province abbreviation (Canada)
custId	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
acctNbr	xsd:string	Y	5	Value assigned by Comdata
misc1	xsd:string	N	15	Misc1 or other identifier assigned to this field
misc2	xsd:string	N	15	Misc2 or other identifier assigned to this field
driverEmail	xsd:string	N	50	Driver Email Address the field permits 50 digits
onHoldFlag	xsd:string	N	1	Value Y or N or Blank. For 'Y', the cardIdentifier value will be placed on hold.
holdReleaseDate	xsd:string	N	10	Date the cardIdentifier hold will be released, Default 0001-01-01 (YYYY-MM-DD)
holdReleaseTime	xsd:string	N	4	Time the cardIdentifier hold will be released, Default 0000 (HHMM) 24-hour format
</DriverIdAddRequest>				

Response Record – Add Driver ID

<DriverIdAddResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</DriverIdAddResponse>			

Add Vehicle ID

The Add Vehicle ID request is used to add a new unit to a vehicle pool. This request mirrors the Add Vehicle ID function in the PS14 batch file process.

Function:	Add Vehicle ID
Web Service Method:	VehicleIdAddRequest
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Add Vehicle ID

<VehicleIdAddRequest>				
<record>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
vehicleId	xsd:string	Y	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be <i>10 digits or less</i> in the web service request and not ≤ 17 digits as in the PS14 batch file process
vinNumber	xsd:string	N	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	N	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	N	20	Vehicle license number of ≤ 20 alphanumeric characters
expirationDate	xsd:string	N	7	YYYY-MM (Year-Month)
miscData1	xsd:string	N	20	Miscellaneous 1 storage field
miscData2	xsd:string	N	20	Miscellaneous 2 storage field
acctNbr	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custId	xsd:string	Y	5	Value assigned by Comdata
hubometerStart	xsd:string	N	6	Hubometer Start Value
hubometerEnd	xsd:string	N	6	Hubometer End Value
unitStatus	xsd:string	N	1	Status of the unit.
onetimeProximityOverrideFlag	xsd:string	N	1	Onetime Proximity Override Field.
</record>				
</VehicleIdAddRequest>				

Response Record – Add Vehicle ID

<VehicleIdAddResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated

responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</VehicleIdAddResponse>			

Add Vehicle ID V02

The Add Vehicle ID V02 request is used to add a new unit to a vehicle pool. This request mirrors the Add Vehicle ID function in the PS14 batch file process.

Function:	Add Vehicle ID V02
Web Service Method:	VehicleIdAddRequestV02
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Add Vehicle ID V02

<VehicleIdAddRequestV02>				
<record>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
vehicleId	xsd:string	Y	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be <i>10 digits or less</i> in the web service request and not ≤ 17 digits as in the PS14 batch file process
vinNumber	xsd:string	N	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	N	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	N	20	Vehicle license number of ≤ 20 alphanumeric characters
expirationDate	xsd:string	N	7	YYYY-MM (Year-Month)
miscData1	xsd:string	N	20	Miscellaneous 1 storage field
miscData2	xsd:string	N	20	Miscellaneous 2 storage field
acctNbr	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custId	xsd:string	Y	5	Value assigned by Comdata
hubometerStart	xsd:string	N	6	Hubometer Start Value
hubometerEnd	xsd:string	N	6	Hubometer End Value
unitStatus	xsd:string	N	1	Status of the unit.
onetimeProximityOverrideFlag	xsd:string	N	1	Onetime Proximity Override Field.
miscData3	xsd:string	N	15	Miscellaneous 3 storage field
tankCapacity	xsd:string	N	10	Tank Capacity of the vehicle/unit.
profileId	xsd:string	N	5	Profile Id of the vehicle/unit.

deviceId	xsd:string	N	30	Device Id of the vehicle/unit.
</record>				
</VehicleIdAddRequestV02>				

Response Record – Add Vehicle ID V02

<VehicleIdAddResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</VehicleIdAddResponse>			

Sample ResponseCodes/Messages

Response Code	Response Message (display)	Reason
0	1) OK.	1) When record got inserted and added successfully for the provided input fields.
99903	1) Vehicle Id Should not be greater than 10 Characters. 2) Vehicle VIN Should not be greater than 30 Characters. 3) Vehicle Description Should not be greater than 30 Characters. 4) Vehicle License Number Should not be greater than 15 Characters. 5) Expiration Date Should not be greater than 7 Characters. 6) Account Code Should not be greater than 5 Characters. 7) Customer Id Should not be greater than 10 Characters. 8) One-time proximity override flag value should not be greater than 1 Character. 9) Misc Data 3 should not be greater than 15 characters. 10) Tank Capacity must be a numeric value. 11) Invalid profile id value. 12) Device Id should not be greater than 30 characters.	1) If passing more then 10-character value for vehicleId field. 2) If passing more then 30-character value for vinNumber field. 3) If passing more then 30-character value for vehicleDescription field. 4) If passing more then 15-character value for licenseNumber field. 5) If passing more then 7-character value for expirationDate field. 6) If passing more then 5-character value for acctNbr field. 7) If passing more then 10-character value for custId field. 8) If passing more then 1 character value for onetimeProximityOverrideFlag field. 9) If passing more then 15-character value for miscData3 field. 10) If passing the alphanumeric and decimal value for tankCapacity field. 11) If passing the profileId field value are less than 5 digit and that profileId value does not mapped/belong to the provided custId value.

Response Code	Response Message (display)	Reason
	13) Profile Id is required when deviceId provided.	12) If passing more then 30-character value for deviceId field. 13) When passing the deviceId value but not profileId during add unit number.
99999	An error has occurred.	This error will occur in case of database connection issue or any unwanted error.

Delete Driver ID

The Delete Driver ID request is used to remove a driver ID from a driver pool. This request mirrors the Delete Driver ID function in the PS14 batch file process.

Function:	Delete Driver ID
Web Service Method:	DriverIdAddRequest
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Delete Driver ID

<DriverIdDeleteRequest>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
DriverId	xsd:string	Y	16	Numeric driver ID of 6 digits; the field permits ≤ 16 digits
acctNbr	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custId	xsd:string	Y	5	Value assigned by Comdata
</DriverIdDeleteRequest>				

Response Record – Delete Vehicle ID

<DriverIdDeleteResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</DriverIdDeleteResponse>			

Delete Vehicle ID

The Delete Vehicle ID request is used to remove a vehicle (unit) ID from a vehicle pool. This request mirrors the Delete Vehicle ID function in the PS14 batch file process.

Function:	Delete Vehicle ID
Web Service Method:	VehicleIdDeleteRequest
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Delete Vehicle ID

<VehicleIdDeleteRequest>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
vehicleId	xsd:string	Y	6	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be 6 digits or less in the web service request and not ≤ 17 digits as in the PS14 batch file process
acctNbr	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custId	xsd:string	Y	5	Value assigned by Comdata
</VehicleIdDeleteRequest>				

Response Record – Delete Vehicle ID

<VehicleIdDeleteResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</VehicleIdDeleteResponse>			

Card Inquiry

Note: This operation has been deprecated and will be removed at some point in the future. Please use the latest version of this function.

The Card Inquiry function is used to request the current attributes of a card. No card updates can be performed using this function. It is an information-only request.

Function:	Card Inquiry
Web Service Method:	cardInquiry
Applicable Card Type:	Comdata MasterCard (physical & ghost)
Other Notes:	

Request Record – Card Inquiry

<CardInquiryRequest>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
empNumCardNumFlag	xsd:string	Y	1	C, E, c, or e (Card Number or Employee Number will be used in the empNumCardNumValue field)
empNumCardNumValue	xsd:string	Y	16	Employee number or card number used as a search criterion based on the empNumCardNumFlag element
maskCardFlag	xsd:string	N	1	Y (yes) returns a masked card number. Space or null returns the full card number as long as the account-level access allows.
</CardInquiryRequest>				

Response Record – Card Inquiry

Element Name	Data Type	Max Len	Comment / Example Value
<CardInquiryResponse>			
cardNumber	xsd:string	16	Full 16-digit Comdata MasterCard number unless masked
<card details>			
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record
cardStatus	xsd:string	1	A = active; B = blocked; C = clear
profileFlag	xsd:string	1	Y (yes) or N (no)

Element Name	Data Type	Max Len	Comment / Example Value
profileValue	xsd:string	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	30	Additional information describing the profile group
cardFirstName	xsd:string	15	Value assigned to the First Name field
cardLastName	xsd:string	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	20	Driver License Number assigned to card
driverLicenseState	xsd:string	2	Use the two-letter state (US) or province (Canada) abbreviation
tripNumber	xsd:string	10	Comdata proprietary (fleet) cards only
vehicleNumber	xsd:string	17	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 6
employeeNumber	xsd:string	16	Employee Number assigned to card
vehicleVINNumber	xsd:string	30	Vehicle's VIN number
vehicleDescription	xsd:string	30	Brief, free-form description of a vehicle
vehicleLicensePlateNumber	xsd:string	15	Vehicle license plate number
registrationExpiration	xsd:date	10	YYYY-MM-DD
miscellaneous1	xsd:string	15	Customer-specific field
miscellaneous2	xsd:string	15	Customer-specific field
cardExpiration	xsd:date	10	YYYY-MM-DD
</card details>			
<amountLimits>			
dailyAmountLimit	xsd:decimal	10	Daily card spending limit
dailyAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the day
dailyAmountLimitHold	xsd:decimal	10	Amount authorized but not yet posted for the day
dailyAmountLimitAvailable	xsd:decimal	10	Amount of daily spend limit remaining after posted and authorized transactions
dailyTxnLimit	xsd:int	6	Daily card transaction limit
dailyTxnLimitUsed	xsd:int	6	Number of transactions posted to the card for the day
dailyTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the day
dailyTxnLimitAvailable	xsd:int	6	Number of daily transactions remaining after posted and authorized transactions
cycleAmountLimit	xsd:decimal	10	Cycle card spending limit
cycleAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the cycle
cycleAmountLimitHold	xsd:decimal	10	Amount authorized but not yet posted for the cycle
cycleAmountLimitAvailable	xsd:decimal	10	Amount of cycle spending limit remaining after posted and authorized transactions
cycleTxnLimit	xsd:int	6	Cycle card transaction limit
cycleTxnLimitUsed	xsd:int	6	Number of card transactions posted for the cycle
cycleTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the cycle
cycleTxnLimitAvailable	xsd:int	6	Number of cycle transactions remaining after posted and authorized transactions

Element Name	Data Type	Max Len	Comment / Example Value
</amountLimits>			
</CardInquiryResponse>			

Card Inquiry 2

The Card Inquiry 2 function is used to request the current attributes of a card.

Function:	Card InquiryV02
Web Service Method:	inquireCardV02
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Inquiry

<CardInquiryRequestV02>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
cardIdentifierType	xsd:string	Y	1	C, E, T, c, e, t (Card Number, Employee Number, Card Token will be used in the cardIdentifier field)
cardIdentifier	xsd:string	Y	16	Employee number, card number, or card token used as a search criterion based on the cardIdentifierType element
maskCardFlag	xsd:string	N	1	Y(yes) returns a masked card number. Space or null returns the full card number as long as the account-level access allows.
</CardInquiryRequestV02>				

Response Record – Card Inquiry

Element Name	Data Type	Max Len	Comment / Example Value
<CardInquiryResponseV02>			
cardNumber	xsd:string	16	Full 16-digit Comdata MasterCard number unless masked
<cardV02>			
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record

Element Name	Data Type	Max Len	Comment / Example Value
cardStatus	xsd:string	1	A = active; B = blocked; C = clear
profileFlag	xsd:string	1	Y (yes) or N (no)
profileValue	xsd:string	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	30	Additional information describing the profile group
cardFirstName	xsd:string	15	Value assigned to the First Name field
cardLastName	xsd:string	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	20	Driver License Number assigned to card
driverLicenseState	xsd:string	2	Use the two-letter state (US) or province (Canada) abbreviation
tripNumber	xsd:string	10	Comdata proprietary (fleet) cards only
vehicleNumber	xsd:string	10	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 10
employeeNumber	xsd:string	16	Employee Number assigned to card
vehicleVINNumber	xsd:string	30	Vehicle's VIN number
vehicleDescription	xsd:string	30	Brief, free-form description of a vehicle
vehicleLicensePlateNumber	xsd:string	15	Vehicle license plate number
registrationExpiration	xsd:date	10	YYYY-MM-DD
miscellaneous1	xsd:string	15	Customer-specific field
miscellaneous2	xsd:string	15	Customer-specific field
cardExpiration	xsd:date	10	YYYY-MM-DD
cardToken	xsd:string	10	card token for the card number
cardBlockReasonCode	xsd:string	4	The block reason code if card is blocked. See cardBlockReasonDesc .
cardBlockReasonDesc	xsd:string	60	If the card is blocked, a description of why the card is blocked. See Appendix A for more details.
</cardV02>			
<amountLimits>			
dailyAmountLimit	xsd:decimal	10	Daily card spending limit
dailyAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the day
dailyAmountLimitHold	xsd:decimal	10	Amount authorized but not yet posted for the day
dailyAmountLimitAvailable	xsd:decimal	10	Amount of daily spend limit remaining after posted and authorized transactions
dailyTxnLimit	xsd:int	6	Daily card transaction limit
dailyTxnLimitUsed	xsd:int	6	Number of transactions posted to the card for the day
dailyTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the day
dailyTxnLimitAvailable	xsd:int	6	Number of daily transactions remaining after posted and authorized transactions
cycleAmountLimit	xsd:decimal	10	Cycle card spending limit
cycleAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the cycle
cycleAmountLimitHold	xsd:decimal	10	Amount authorized but not yet posted for the cycle

Element Name	Data Type	Max Len	Comment / Example Value
cycleAmountLimitAvailable	xsd:decimal	10	Amount of cycle spending limit remaining after posted and authorized transactions
cycleTxnLimit	xsd:int	6	Cycle card transaction limit
cycleTxnLimitUsed	xsd:int	6	Number of card transactions posted for the cycle
cycleTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the cycle
cycleTxnLimitAvailable	xsd:int	6	Number of cycle transactions remaining after posted and authorized transactions
</amountLimits>			
<mailingDetailsV02>			
mailMethod	xsd:string	1	Method of mailing
mailName	xsd:string	30	Receiver name
mailAttentionTo	xsd:string	30	Attention line
mailAddress1	xsd:string	30	Address line 1
mailAddress2	xsd:string	30	Address line 2
mailCity	xsd:string	20	City
mailState	xsd:string	2	State abbreviation
mailZip	xsd:string	10	Zip code
mailCountry	xsd:string	3	Country Code
</mailingDetailV02>			
</CardInquiryResponseV02>			

Card Inquiry 3

The Card Inquiry 3 function is used to request the current attributes of a card.

Function:	Card InquiryV03
Web Service Method:	inquireCardV03
Applicable Card Type:	Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Inquiry V03

<CardInquiryRequestV03>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)

discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
cardIdentifierType	xsd:string	Y	1	C, E, T, c, e, t (Card Number, Employee Number, Card Token will be used in the cardIdentifier field)
cardIdentifier	xsd:string	Y	16	Employee number, card number, or card token used as a search criterion based on the cardIdentifierType element
maskCardFlag	xsd:string	N	1	Y(yes) returns a masked card number. Space or null returns the full card number as long as the account-level access allows.
</CardInquiryRequestV03>				

Response Record – Card Inquiry V03

Element Name	Data Type	Max Len	Comment / Example Value
<CardInquiryResponseV03>			
cardNumber	xsd:string	16	Full 16-digit Comdata MasterCard number unless masked
<cardV02>			
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record

Element Name	Data Type	Max Len	Comment / Example Value
cardStatus	xsd:string	1	A = active; B = blocked; C = clear
profileFlag	xsd:string	1	Y (yes) or N (no)
profileValue	xsd:string	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	30	Additional information describing the profile group
cardFirstName	xsd:string	15	Value assigned to the First Name field
cardLastName	xsd:string	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	20	Driver License Number assigned to card
driverLicenseState	xsd:string	2	Use the two-letter state (US) or province (Canada) abbreviation
tripNumber	xsd:string	10	Comdata proprietary (fleet) cards only
vehicleNumber	xsd:string	10	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 10
employeeNumber	xsd:string	16	Employee Number assigned to card
vehicleVINNumber	xsd:string	30	Vehicle's VIN number

vehicleDescription	xsd:string	30	Brief, free-form description of a vehicle
vehicleLicensePlateNumber	xsd:string	15	Vehicle license plate number
registrationExpiration	xsd:date	10	YYYY-MM-DD
miscellaneous1	xsd:string	15	Customer-specific field
miscellaneous2	xsd:string	15	Customer-specific field
cardExpiration	xsd:date	10	YYYY-MM-DD
cardToken	xsd:string	10	card token for the card number
cardBlockReasonCode	xsd:string	4	The block reason code if card is blocked. See cardBlockReasonDesc.
cardBlockReasonDesc	xsd:string	60	If the card is blocked, a description of why the card is blocked. See Appendix A for more details.
</cardV02>			
<amountLimits>			
dailyAmountLimit	xsd:decimal	10	Daily card spending limit
dailyAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the day
dailyAmountLimitHold	xsd:decimal	10	Amount authorized but not yet posted for the day
dailyAmountLimitAvailable	xsd:decimal	10	Amount of daily spend limit remaining after posted and authorized transactions
dailyTxnLimit	xsd:int	6	Daily card transaction limit
dailyTxnLimitUsed	xsd:int	6	Number of transactions posted to the card for the day
dailyTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the day
dailyTxnLimitAvailable	xsd:int	6	Number of daily transactions remaining after posted and authorized transactions
cycleAmountLimit	xsd:decimal	10	Cycle card spending limit
cycleAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the cycle
cycleAmountLimitHold	xsd:decimal	10	Amount authorized but not yet posted for the cycle
Element Name	Data Type	Max Len	Comment / Example Value
cycleAmountLimitAvailable	xsd:decimal	10	Amount of cycle spending limit remaining after posted and authorized transactions
cycleTxnLimit	xsd:int	6	Cycle card transaction limit
cycleTxnLimitUsed	xsd:int	6	Number of card transactions posted for the cycle
cycleTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the cycle
cycleTxnLimitAvailable	xsd:int	6	Number of cycle transactions remaining after posted and authorized transactions
</amountLimits>			
<mailingDetailsV02>			
mailMethod	xsd:string	1	Method of mailing

mailName	xsd:string	30	Receiver name
mailAttentionTo	xsd:string	30	Attention line
mailAddress1	xsd:string	30	Address line 1
mailAddress2	xsd:string	30	Address line 2
mailCity	xsd:string	20	City
mailState	xsd:string	2	State abbreviation
mailZip	xsd:string	10	Zip code
mailCountry	xsd:string	3	Country Code
</mailingDetailV02>			
<alertsPreferences>			
emailAlertActive	xsd:string	1	Y (yes) or N (no)
emailAddress	xsd:string	50	Cardholders Email address for Aler Notification
smsAlertActive	xsd:string	1	Y (yes) or N (no)
smsPhoneNumber	xsd:string	10	Cardholders 10 Digit Mobile Number
</alertsPreferences>			
</CardInquiryResponseV03>			

Card Update

Note: This operation has been deprecated. Please use the latest version of this function. This version will be removed at some point in the future.

The Card Update function is used to make updates to a customer's card. This is the web services request with the most options, and it is likely to be the most used.

Function:	Card Update Request
Web Service Method:	updateCard
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Update

Element Name	Data Type	Req	Max Len	Comment / Example Value
<UpdateCardRequest>				

Element Name	Data Type	Req	Max Len	Comment / Example Value
empNumCardNumFlag	xsd: string	Y	1	C, E, c, or e (Card Number or Employee Number used for the empNumCardNumValue)
empNumCardNumValue	xsd: string	Y	16	Employee number or card number used to search
<cardDetails>				
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
cardStatus	xsd:string	N	1	A = active; B = blocked; C = clear
profileFlag	xsd:string	N	1	Y (Yes) or N (No)
profileValue	xsd:string	N	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	N		Additional information describing the profile group
cardFirstName	xsd:string	N	15	Value assigned to the First Name field
cardLastName	xsd:string	N	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	N	20	Driver License Number assigned to card
driverLicenseState	xsd:string	N	2	Use the two-letter state (US) or province (Canada) abbreviation
tripNumber	xsd:string	N	10	Comdata proprietary (fleet) cards only
vehicleNumber	xsd:string	N	17	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 6
employeeNumber	xsd:string	Y	16	Employee Number assigned to card
vehicleVINNumber	xsd:string	N	30	Vehicle's VIN number
vehicleLicensePlateNumber	xsd:string	N	15	Vehicle license plate number
registrationExpiration	xsd:string	N	10	Vehicle registration expiration date: – YYYY-MM-DD E.g., 2025-03-15
miscellaneous1	xsd:string	N	15	Customer-specific field
miscellaneous2	xsd:string	N	15	Customer-specific field
cardExpiration	xsd:string	N	10	Card expiration date: – YYYY-MM-DD E.g., 2025-03-15
</cardDetails>				
<mailingDetails>				
mailMethod	xsd:string	N	1	<u>Numbers 0-9, no 2 option</u> 1 – UPS Next Day Air 4 – FEDEX Priority 3 – UPS 2 nd Day 6 – FEDEX Two Day 5 – UPS Ground 7 – FEDEX Ground 8 – USPS 9 – FEDEX International 0 – UPS Worldwide Expedited
mailName	xsd:string	N	30	Company Name

Element Name	Data Type	Req	Max Len	Comment / Example Value
mailAttention To	xsd:string	N	30	Attention to Person
mailAddress1	xsd:string	N	30	Mailing Address Line 1
mailAddress2	xsd:string	N	30	Mailing Address Line 2
mailCity	xsd:string	N	20	Mailing City
mailState	xsd:string	N	2	2-letter abbreviation for the state (US) or province (Canada)
mailZip	xsd:string	N	10	Mailing Zip Code
</mailingDetails>				
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); Yes returns a masked card number
<alertsPreferences>				
emailAlertActive	xsd:string	N	1	Y (yes) or N (no)
emailAddress	xsd:string	N	50	Email Address (Email field is required when emailAlertActive flag is Y)
smsAlertActive	xsd:string	N	1	Y (yes) or N (no)
smsPhoneNumber	xsd:string	N	10	Mobile Number should 10 digits (smsPhoneNumber is required when smsAlertActive flag is Y)
</alertsPreferences>				
</UpdateCardRequest>				

Response Record – Card Update

Element Name	Data Type	Max Len	Comment / Example Value
<UpdateCardResponse>			
<response>			
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:string	10	Customer-assigned value returned in the response record
cardNumber	xsd:string	16	Card number if used in the request
employeeNumber	xsd:string	16	Employee number if used in the request
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: UPDATE COMPLETED
</response>			
</UpdateCardResponse>			

Card Update 2

The Card Update 2 function is used to make updates to a customer's card. This is the web services request with the most options.

Function:	Card Update 2
Web Service Method:	updateCardV02
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Update 2

Element Name	Data Type	Req	Max Len	Comment / Example Value
<UpdateCardRequestV02>				
cardIdentifierType	xsd: string	Y	1	C, E, T, c, e, or t (Card Number, Employee Number, Card Token used for the cardIdentifierType)
cardIdentifier	xsd: string	Y	16	Employee number, card number, or card token used to search
<cardDetails>				
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
cardStatus	xsd:string	N	1	A = active; B = blocked; C = clear
profileFlag	xsd:string	N	1	Y (Yes) or N (No)
profileValue	xsd:string	N	3	3-digit number identifying the profile group for the cardholder, if applicable
profileDescription	xsd:string	N		Additional information describing the profile group
cardFirstName	xsd:string	N	15	Value assigned to the First Name field
cardLastName	xsd:string	N	20	Value assigned to the Last Name field
driverLicenseNumber	xsd:string	N	20	Driver License Number assigned to card
driverLicenseState	xsd:string	N	2	Use the two-letter state (US) or province (Canada) abbreviation
tripNumber	xsd:string	N	10	Comdata proprietary (fleet) cards only
vehicleNumber	xsd:string	N	10	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 10
employeeNumber	xsd:string	N	16	Employee Number assigned to card
vehicleVINNumber	xsd:string	N	30	Vehicle's VIN number
vehicleLicensePlateNumber	xsd:string	N	15	Vehicle license plate number

Element Name	Data Type	Req	Max Len	Comment / Example Value
registrationExpiration	xsd:string	N	10	Vehicle registration expiration date: – YYYY-MM-DD E.g., 2025-03-15
miscellaneous1	xsd:string	N	15	Customer-specific field
miscellaneous2	xsd:string	N	15	Customer-specific field
cardExpiration	xsd:string	N	10	Card expiration date: – YYYY-MM-DD E.g., 2025-03-15
</cardDetails>				
<mailingDetails>				
mailMethod	xsd:string	N	1	Numbers 0-9, no 2 option 1 – UPS Next Day Air 4 – FEDEX Priority 3 – UPS 2 nd Day 6 – FEDEX Two Day 5 – UPS Ground 7 – FEDEX Ground 8 – USPS 9 – FEDEX International 0 – UPS Worldwide Expedited
mailName	xsd:string	N	30	Company Name
mailAttention To	xsd:string	N	30	Attention to Person
mailAddress1	xsd:string	N	30	Mailing Address Line 1
mailAddress2	xsd:string	N	30	Mailing Address Line 2
mailCity	xsd:string	N	20	Mailing City
mailState	xsd:string	N	2	2-letter abbreviation for the state (US) or province (Canada)
mailZip	xsd:string	N	10	Mailing Zip Code
mailCountry	xsd:string	N	3	Mailing Country Code, Ex: USA, MEX, CAN
</mailingDetails>				
maskCardFlag	xsd:string	N	1	Y(yes) returns a masked card number. Space or null returns the full card number as long as the account-level access allows
<alertsPreferences>				
emailAlertActive	xsd:string	N	1	Y (yes) or N (no)
emailAddress	xsd:string	N	50	Email Address (Email field is required when emailAlertActive flag is Y)
smsAlertActive	xsd:string	N	1	Y (yes) or N (no)
smsPhoneNumber	xsd:string	N	10	Mobile Number should 10 digits (smsPhoneNumber is required when smsAlertActive flag is Y)
</alertsPreferences>				
</UpdateCardRequestV02>				

Response Record – Card Update

Element Name	Data Type	Max Len	Comment / Example Value
<UpdateCardResponseV02>			
<response>			
accountCode	xsd:string	5	Value assigned by Comdata

customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:string	10	Customer-assigned value returned in the response record
cardNumber	xsd:string	16	Card number if used in the request
employeeNumber	xsd:string	16	Employee number if used in the request
responseCode	xsd:string	5	0=Success Anything Else=Error

Element Name	Data Type	Max Len	Comment / Example Value
responseDescription	xsd:string	80	If the request succeeded, the message should be: UPDATE COMPLETED
</response>			
</UpdateCardResponseV02>			

Customer Profile Limit Inquiry

The Customer Profile Limit Inquiry request is used to view customer-level spending limits, including daily dollar/transaction/quantity and cycle dollar/transaction/quantity limits.

Function:	Customer Profile Limit Inquiry
Web Service Method:	CustomerProfileLimitInquiryRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Customer Profile Limit Inquiry

<CustomerProfileLimitInquiryRequest>				
<requestUtil>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
profileID	xsd:string	Y	3	3-digit profile ID specified by customer
productCode	xsd:int	Y	5	5-digit product level (merchant group or MCC)
</requestUtil>				
</CustomerProfileLimitInquiryRequest>				

Response Record – Customer Profile Limit Inquiry

Element Name	Data Type	Max Len	Comment / Example Value
<CustomerProfileLimitInquiryResponse>			
<responseUtil>			
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)

Element Name	Data Type	Max Len	Comment / Example Value
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record
profileID	xsd:string	3	3-digit profile ID specified by customer
productCode	xsd:int	5	5-digit product level (merchant group or MCC)
</responseUtil>			
<profileLimits>			
openCloseFlag	xsd:string	1	O=open, C=Close
productAvailableFlag	xsd:string	1	Y = Yes, N or blank = No
transactionDollarLimit	xsd:decimal	10	Spending limit per transaction
transactionQuantityLimit	xsd:int	8	Limits number of transactions
dailyDollarLimit	xsd:decimal	10	Daily card spending limit
dailyTransactionLimit	xsd:limit	6	Limits daily number of transactions
dailyQuantityLimit	xsd:int	8	Limits daily amount of spending
cycleDollarLimit	xsd:decimal	10	Cycle card spending limit
cycleTransactionLimit	xsd:int	6	Limits number of transactions in cycle
cycleQuantityLimit	xsd:int	8	Limits amount of spending in cycle
cycleType	xsd:string	1	M = Monthly W = Weekly T = Never Reset, no blanks
cycleDay	xsd:string	7	Values M=01-31, W = 01000000 (Tuesday Reset), T = None
</profileLimits>			
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: INQUIRY SUCCESSFUL
</CustomerProfileLimitInquiryResponse>			

Driver ID Inquiry

The Driver ID Inquiry request is used to pull a list of driver IDs under an account. Search results are returned by page with up to 50 records per page. In the request, you can specify a page number or the results will display the first page by default. To retrieve pages 1, 2, 3, and 4 of the records requires four individual requests.

Function:	Driver ID Inquiry
Web Service Method:	DriverIdInquireRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Driver ID Inquiry

<DriverIdInquireRequest>				
<criteria>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
driverID	xsd:string	N	16	Numeric driver ID of 6 digits; the field permits ≤ 16 digits
firstName	xsd:string	N	15	Value assigned to the First Name field
lastName	xsd:string	N	20	Value assigned to the Last Name field
driverLicNbr	xsd:string	N	20	US or Canadian driver's license number
driverLicState	xsd:string	N	2	2-letter state abbreviation (US) or province abbreviation (Canada)
custId	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
acctNbr	xsd:string	Y	5	Value assigned by Comdata
misc1	xsd:string	N	15	Value assigned to the Misc1 field
misc2	xsd:string	N	15	Value assigned to the Misc2 field
driverEmail	xsd:string	N	50	Value assigned to the Driver Email address field
onHoldFlag	xsd:string	N	1	Value Y or N or Blank.
holdReleaseDate	xsd:string	N	10	Date the cardIdentifier hold will be released (YYYY-MM-DD)
holdReleaseTime	xsd:string	N	4	Time the cardIdentifier hold will be released (HHMM) 24-hour Format
</criteria>				
pageNbr	xsd:string	N	6	≤ 6 digits
</DriverIdInquireRequest>				

Response Record – Driver ID Inquiry

Element Name	Data Type	Max Len	Comment / Example Value
<DriverIdInquireResponse>			
pageCount	xsd:int	1	Number of pages in the search result
pageNbr	xsd:int	6	Current page in the search result; number value of ≤ 6 digits

Element Name	Data Type	Max Len	Comment / Example Value
recordCount	xsd:int	2	Number of records (≤ 50) in the current page
<records>*			
<DriverIdSearchRecord>			
driverId	xsd:string	16	Numeric driver ID of 6 digits; the field permits ≤ 16 digits
firstName	xsd:string	15	Value assigned to the First Name field
lastName	xsd:string	20	Value assigned to the Last Name field
driverLicNbr	xsd:string	20	US or Canadian driver's license number
driverLicState	xsd:string	2	2-letter state abbreviation (US) or province abbreviation (Canada)
custId	xsd:string	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
acctNbr	xsd:string	5	Value assigned by Comdata
acctName	xsd:string	30	Name set up for the Account Code
custName	xsd:string	30	Name set up for the Customer ID
misc1	xsd:string	15	Value assigned to the Misc1 field
misc2	xsd:string	15	Value assigned to the Misc2 field
driverEmail	xsd:string	50	Value assigned to the Driver Email address field
onHoldFlag	xsd:string	1	Value assigned to hold flag field.
holdReleaseDate	xsd:string	10	Date the cardIdentifier hold will be released (YYYY-MM-DD)
holdReleaseTime	xsd:string	4	Time the cardIdentifier hold will be released (HHMM) 24-hour format
</DriverIdSearchRecord>			
</records>			
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</DriverIdInquireResponse>			

*Elements under <records> are repeated for every Driver ID Search Record, followed by a single </records>

Vehicle ID Inquiry

The Vehicle ID Inquiry request is used to pull a list of pooled vehicles (units) under an account. Search results are returned in a page with 50 records per page. In the request, you can specify the specific page to view or the first page will display by default. To retrieve pages 1, 2, 3, and 4 of the records requires four individual requests.

Function:	Vehicle ID Inquiry
Web Service Method:	VehicleIdInquireRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Vehicle ID Inquiry

<VehicleIdInquireRequest>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
<criteria>				
vehicleId	xsd:string	N	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be 10 digits or less and not ≤ 17 digits as permitted
vinNumber	xsd:string	N	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	N	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	N	20	Vehicle license number of ≤ 20 alphanumeric characters
expirationDate	xsd:string	N	7	YYYY-MM (Year-Month)
miscData1	xsd:string	N	20	Miscellaneous storage field
miscData2	xsd:string	N	20	Miscellaneous storage field
acctNbr	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custId	xsd:string	Y	5	Value assigned by Comdata
hubometerStart	xsd:string	N	6	Hubometer Start Value
hubometerEnd	xsd:string	N	6	Hubometer End Value
</criteria>				
pageNbr	xsd:string	N	6	≤ 6 digits
</VehicleIdInquireRequest>				

Response Record – Vehicle ID Inquiry

Element Name	Data Type	Max Len	Comment / Example Value
<VehicleIdInquireResponse>			
pageCount	xsd:int	1	Number of pages in the search result
pageNbr	xsd:int	6	Current page in the search result; value of ≤ 6 digits
recordCount	xsd:int	2	Number of records (≤ 50) in the current page

Element Name	Data Type	Max Len	Comment / Example Value
<records>*			
<VehicleIdSearchRecord>			
vehicleId	xsd:string	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be 6 digits or less and not ≤ 17 digits as permitted
vinNumber	xsd:string	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	20	Vehicle license number of ≤ 20 alphanumeric characters
expirationDate	xsd:string	7	YYYY-MM (Year-Month)
miscData1	xsd:string	20	Miscellaneous 1 storage field
miscData2	xsd:string	20	Miscellaneous 2 storage field
acctNbr	xsd:string	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
acctName	xsd:string	30	Name set up for the Account Code
custId	xsd:string	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custName	xsd:string	30	Name set up for the Customer ID
hubometerStart	xsd:string	6	Hubometer Start Value
hubometerEnd	xsd:string	6	Hubometer End Value
</VehicleIdSearchRecord>			
</records>			
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</VehicleIdInquireResponse>			

*Elements under <records> are repeated for every Vehicle ID Search Record, followed by a single </records>

Vehicle ID Inquiry V02

The Vehicle ID Inquiry V02 request is used to pull a list of pooled vehicles (units) under an account. Search results are returned in a page with 50 records per page. In the request, you can specify the specific page to view or the first page will display by default. To retrieve pages 1, 2, 3, and 4 of the records requires four individual requests.

Function:	Vehicle ID Inquiry V02
Web Service Method:	VehicleIdInquireRequestV02
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Vehicle ID Inquiry

<VehicleIdInquireRequestV02>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
<criteria>				
vehicleId	xsd:string	N	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be 10 digits or less and not $\leq$ 17 digits as permitted
vinNumber	xsd:string	N	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	N	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	N	20	Vehicle license number of $\leq$ 20 alphanumeric characters
expirationDate	xsd:string	N	7	YYYY-MM (Year-Month)
miscData1	xsd:string	N	20	Miscellaneous storage field
miscData2	xsd:string	N	20	Miscellaneous storage field
acctNbr	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custId	xsd:string	Y	5	Value assigned by Comdata
hubometerStart	xsd:string	N	6	Hubometer Start Value
hubometerEnd	xsd:string	N	6	Hubometer End Value
</criteria>				
pageNbr	xsd:string	N	6	$\leq$ 6 digits
</VehicleIdInquireRequestV02>				

Response Record – Vehicle ID Inquiry V02

Element Name	Data Type	Max Len	Comment / Example Value
<VehicleIdInquireResponseV02>			
pageCount	xsd:int	1	Number of pages in the search result
pageNbr	xsd:int	6	Current page in the search result; value of $\leq$ 6 digits

Element Name	Data Type	Max Len	Comment / Example Value
recordCount	xsd:int	2	Number of records (≤ 50) in the current page
<records>*			
<VehicleIdSearchRecordV02>			
vehicleId	xsd:string	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be 6 digits or less and not ≤ 17 digits as permitted
vinNumber	xsd:string	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	20	Vehicle license number of ≤ 20 alphanumeric characters
expirationDate	xsd:string	7	YYYY-MM (Year-Month)
miscData1	xsd:string	20	Miscellaneous 1 storage field
miscData2	xsd:string	20	Miscellaneous 2 storage field
acctNbr	xsd:string	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
acctName	xsd:string	30	Name set up for the Account Code
custId	xsd:string	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
custName	xsd:string	30	Name set up for the Customer ID
hubometerStart	xsd:string	6	Hubometer Start Value
hubometerEnd	xsd:string	6	Hubometer End Value
miscData3	xsd:string	15	Miscellaneous 3 storage field.
tankCapacity	xsd:string	10	Tank Capacity of the vehicle/unit.
profileId	xsd:string	5	Profile Id of the vehicle/unit.
deviceId	xsd:string	30	Device Id of the vehicle/unit.
maxDailyPurchase	xsd:string	13	Max Daily Purchase Amount.
lastTxnLocation	xsd:string	50	Last Transaction Location.
lastTxnDate	xsd:string	10	Last Transaction Date.
lastTxnTime	xsd:string	8	Last Transaction Time.
lastPersonUsingCard	xsd:string	30	Last Person Name of using card.
unitStatus	xsd:string	1	Unit Status of the vehicle/unit.
</VehicleIdSearchRecordV02>			
</records>			
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: OK
</VehicleIdInquireResponseV02>			

*Elements under <records> are repeated for every Vehicle ID Search Record, followed by a single </records>

Update Customer Profile Limit

The Update Customer Profile Limit request allows you to make changes to the limits on a cardholder's card. Updates can be made to the limits set on overall, daily, and cycle transactions by dollars/number of transactions/and/or quantities.

Function:	Update Customer Profile Limit
Web Service Method:	CustomerProfileLimitUpdateRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Update Customer Profile Limit

Element Name	Data Type	Req	Max Len	Comment / Example Value
<CustomerProfileLimitUpdateRequest>				
<requestUtil>				
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	Y	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
profileID	xsd:string	Y	3	3-digit profile ID specified by customer
productCode	xsd:int	Y	5	5-digit product level (merchant group or MCC)
</requestUtil>				
<profileLimits>				
openCloseFlag	xsd:string	N	1	O=open, C=close
productAvailableFlag	xsd:string	N	1	Y = Yes, N or blank = No
transactionDollarLimit	xsd:decimal	N	10	Spending limit per transaction
transactionQuantityLimit	xsd:int	N	8	Limits number of transactions
dailyDollarLimit	xsd:decimal	N	10	Daily card spending limit
dailyTransactionLimit	xsd:limit	N	6	Limits daily number of transactions
dailyQuantityLimit	xsd:int	N	8	Limits daily amount of spending
cycleDollarLimit	xsd:decimal	N	10	Cycle card spending limit
cycleTransactionLimit	xsd:int	N	6	Limits number of transactions in cycle
cycleQuantityLimit	xsd:int	N	8	Limits amount of spending in cycle
cycleType	xsd:string	N	1	M = Monthly W = Weekly T = Never Reset, no blanks
cycleDay	xsd:string	N	7	Values M=01-31, W = 01000000 (Tuesday Reset), T = None
</profileLimits>				
</CustomerProfileLimitUpdateRequest>				

Response Record – Update Customer Profile Limit

<CustomerProfileLimitUpdateResponse>			
<responseUtil>			
Element Name	Data Type	Max Len	Comment / Example Value
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record
profileID	xsd:string	3	3-digit profile ID specified by customer
productCode	xsd:int	5	5-digit product level (merchant group or MCC)
</responseUtil>			
responseCode	xsd:int	5	0=Success Anything Else=Error
responseMessage	xsd:string	80	If the request succeeded, the response message should be: UPDATE SUCCESSFUL
</CustomerProfileLimitUpdateResponse>			

Card Security Code Inquiry

The Card Security Code Inquiry function is used to retrieve a cardholder's security (CVC2) code.

Function:	Card Security Code Inquiry
Web Service Method:	CardSecurityCodeInquiryRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Security Code Inquiry Request

<CardSecurityCodeInquiryRequest>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response record
empNumCardNumFlag	xsd:string	Y	1	C, E, c, or e (Card Number or Employee Number); indicates the number type used for empNumCardNumValue
empNumCardNumValue	xsd:string	Y	16	Employee number or card number to search
cardExpirationDate	xsd:date	Y	10	YYYY – MM – DD (Year – Month – Date)

maskCardFlag	xsd:string	N	1	Y (yes) or N (no); yes masks the full card number
</CardSecurityCodeInquiryRequest>				

Response Record – Card Security Code Inquiry Request

<CardSecurityCodeInquiryResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record
cardNumber	xsd:string	16	Full 16-digit card number unless masked
employeeNumber	xsd:string	10	Employee Number assigned to card.
card security code	xsd:string	3	The 3-digit CVC2 security code; add a leading zero if this returns a 2-digit CVC2 code
</CardSecurityCodeInquiryResponse>			

Card Profile Limit Inquiry

The Card Profile Limit Inquiry request is used to view card-level transaction limits, including information on dollar/transaction/and/or quantity limits. You can review limits by overall, daily, and cycle terms. This is an information-only request. The Card Profile Limit Update request (see below) is used to make changes.

Function:	Card Profile Limit Inquiry
Web Service Method:	CardProfileLimitInquiryRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Profile Limit Inquiry

<CardProfileLimitInquiryRequest>				
<cardProfileLimitRequestUtil>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response Record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response Record

productCode	xsd:string	N	5	5-digit product level (merchant group or MCC)
</cardProfileLimitRequestUtil>				
empNumCardNumFlag	xsd:string	Y	1	C, E, c, or e (Card Number or Employee Number): this specifies the type of number used in empNumCardNumValue
empNumCardNumValue	xsd:string	Y	16	Employee number or card number used to search
</CardProfileLimitInquiryRequest>				

Response Record – Card Profile Limit Inquiry

Element Name	Data Type	Max Len	Comment / Example Value
<cardProfileLimitInquiryResponse>			
<responseutil>			
accountCode	xsd:string	5	Value assigned by Comdata
customerId	xsd:string	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record
productCode	xsd:int	5	5-digit product level (merchant group or MCC)
</responseutil>			
<profileLimits>			
openCloseFlag	xsd:string	N	O=open, C=close
productAvailableFlag	xsd:string	N	Y = Yes, N or blank = No
transactionDollarLimit	xsd:decimal	N	Spending limit per transaction
transactionQuantityLimit	xsd:int	N	Limits number of transactions
dailyDollarLimit	xsd:decimal	N	Daily card spending limit
dailyTransactionLimit	xsd:limit	N	Limits daily number of transactions
dailyQuantityLimit	xsd:int	N	Limits daily amount of spending
cycleDollarLimit	xsd:decimal	N	Cycle card spending limit
cycleTransactionLimit	xsd:int	N	Limits number of transactions in cycle
cycleQuantityLimit	xsd:int	N	Limits amount of spending in cycle
cycleType	xsd:string	N	M = Monthly W = Weekly T = Never Reset, no blanks
cycleDay	xsd:string	N	Values M=01-31, W = 01000000 (Tuesday Reset), T = None
</profileLimits>			
responseCode	xsd:int	Y	0=Success Anything Else=Error
responseDescription	xsd:string	Y	If the request succeeded, the message will be: INQUIRY SUCCESSFUL
</cardProfileLimitInquiryResponse>			

Customer Profile Listing

The Customer Profile Listing request is used to view customer-level transaction profiles.

Function:	Customer Profile Listing
Web Service Method:	customerProfileListing
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Customer Profile Listing

<CustomerProfileListingRequest>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
customerId	xsd:string	Y	5	Value assigned by Comdata (4-digit Customer IDs will include a leading zero.)
maxRows	xsd:string	N	10	The number of profiles the user wants returned per request. Default is 50, max is 999.
pageNbr	xsd:string	N	5	The pageNbr indicates which set of profiles the user wants returned. For example, if maxRows equals 50 and the user wants profiles 51 through 100 returned, then the pageNbr value should be 2.
</CustomerProfileListingRequest>				

Response Record – Customer Profile Listing

<CustomerProfileListingResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
pageNbr	xsd:string	5	Value assigned by Comdata.
recordCount	xsd:string	5	Number of records returned in this request. If the recordCount is less than maxRows, this is the last set of profiles available.
<records>			
profileID	xsd:string	3	The ID of the profile
profileIDDescription	xsd:string	30	Description of the profile
</records>			
responseCode	xsd:int	5	00000=Success, any other value = error
responseDescription	xsd:string	80	If the request succeeded, the message will be: Success, if the request errored, the error description will display
</CustomerProfileListingResponse>			

Customer Profile Listing – Sample Request/Response

In this example, customer ID 03000 has a total of 52 profiles. The user is requesting that 50 records be returned per response (maxRows equals "50") and is asking for the second group of fifty profiles (pageNbr equals "2"). The result is that the fifty-first and fifty-second profiles are returned.

Request:

```
<soapenv:Body>
  <main:CustomerProfileListingRequest>
    <customerId>03000</customerId>
    <maxRows>50</maxRows>
  </main:CustomerProfileListingRequest>
</soapenv:Body>
```

Response:

```
<soapenv:Body>
  <p228:CustomerProfileListingResponse xmlns:p228="http://fleetCredit02.comdata.com/maintenance/">
    <pageNbr>2</pageNbr>
    <recordCount>2</recordCount>
    <records>
      <profileID>901</profileID>
      <profileIDDescription>DESC 901</profileIDDescription>
    </records>
    <records>
      <profileID>999</profileID>
      <profileIDDescription>PROMPTING TEST</profileIDDescription>
    </records>
    <responseCode>00000</responseCode>
    <responseDescription>SUCCESS</responseDescription>
  </p228:CustomerProfileListingResponse>
</soapenv:Body>
```

Update Card Profile Limit

Note: This function applies to cards with a T cycle status or cards not on company standards.

The Update Card Profile Limit request is used to adjust the limits on a cardholder's card. Updates can be made to the limits set on overall, daily, and cycle transactions in terms of dollars/number of transactions/and/or quantities.

Function:	Update Card Profile Limit
Web Service Method:	CardProfileLimitUpdateRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Update Card Profile Limit

<CardProfileLimitUpdateRequest>				
<requestUtil>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
discretionaryData	xsd:string	N	10	Customer-assigned value returned in the response Record
trackingNumber	xsd:long	N	10	Customer-assigned value returned in the response Record
productCode	xsd:int	N	5	5-digit product level (merchant group or MCC)
</requestUtil>				
empNumCardNumFlag	xsd:string	Y	1	C = card number; E = employee number
empNumCardNumValue	xsd:string	Y	16	Employee number or card number used as a search criterion based on the empNumCardNumFlag element
<profileLimits>				
openCloseFlag	xsd:string	N	1	O=open, C=close
productAvailableFlag	xsd:string	N	1	Y = Yes, N or blank = No
transactionDollarLimit	xsd:decimal	N	10	Spending limit per transaction
dailyDollarLimit	xsd:decimal	N	10	Daily card spending limit
dailyTransactionLimit	xsd:int	N	6	Limits daily number of transactions
cycleDollarLimit	xsd:decimal	N	10	Cycle card spending limit
cycleTransactionLimit	xsd:int	N	6	Limits number of transactions in cycle
cycleType	xsd:string	N	1	M = Monthly W = Weekly T = Never Reset, no blanks
cycleDay	xsd:string		7	Values M=01-31, W = 01000000 (Tuesday Reset), T = None
</profileLimits>				

</CardProfileLimitUpdateRequest>

Response Record – Update Card Profile Limit

<CardProfileLimitUpdateResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
accountCode	xsd:string	5	Value assigned by Comdata.
customerId	xsd:string	5	Value assigned by Comdata. Leading zero on 4-digit Customer IDs is optional.
discretionaryData	xsd:string	10	Customer-assigned value returned in the response record
responseCode	xsd:int	5	0=Update Complete Anything Else=Error
responseMessage	xsd:string	80	Response description
trackingNumber	xsd:long	10	Customer-assigned value returned in the response record
</CardProfileLimitUpdateResponse>			

Update Driver ID

The Update Driver ID request is used to change driver information for a Driver ID. This request mirrors the update function in the PS14 batch file process.

Function:	Update Driver ID
Web Service Method:	DriverIdUpdateRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Update Driver ID

PinSe<DriverIdUpdateRequest>				
<record>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
driverID	xsd:string	Y	16	Numeric driver ID of 6 digits; the field permits ≤ 16 digits
firstName	xsd:string	N	15	First name or other identifier assigned to this field
lastName	xsd:string	N	20	Last name or other identifier assigned to this field
driverLicNbr	xsd:string	N	20	US or Canadian driver's license number
driverLicState	xsd:string	N	2	2-letter state abbreviation (US) or province abbreviation (Canada)
custId	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
acctNbr	xsd:string	Y	5	Value assigned by Comdata
misc1	xsd:string	N	15	Misc1 or other identifier assigned to this field
misc2	xsd:string	N	15	Misc2 or other identifier assigned to this field

driverEmail	xsd:string	N	50	Driver Email Address the field permits 50 digits
onHoldFlag	xsd:string	N	1	Value Y or N or Blank. For 'Y', the cardIdentifier value will placed on hold.
holdReleaseDate	xsd:string	N	10	Date the cardIdentifier hold will be released, Default 0001-01-01 (YYYY-MM-DD)
holdReleaseTime	xsd:string	N	4	Time the cardIdentifier hold will be released, Default 0000 (HHMM) 24-hour format
</record>				
</DriverIdUpdateRequest>				

Response Record – Update Driver ID

<DriverIdUpdateResponse >			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated
responseCode	xsd:int	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	Description of the response code
</DriverIdUpdateResponse>			

Update Vehicle ID

The Update Vehicle ID request is used to change information for a pooled vehicle (unit). This request mirrors the update function in the PS14 batch file process.

Function:	Update Vehicle ID
Web Service Method:	updateVehicleId
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Update Vehicle ID

<VehicleIdUpdateRequest>				
<record>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
vehicleId	xsd:string	Y	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be 10 digits or less in the web service request and not ≤ 17 digits as in the PS14 batch file process
vinNumber	xsd:string	N	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	N	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	N	20	Vehicle license number of ≤ 20 alphanumeric characters

expirationDate	xsd:string	N	7	YYYY-MM (Year-Month)
miscData1	xsd:string	N	20	Miscellaneous storage field
miscData2	xsd:string	N	20	Miscellaneous storage field
acctNbr	xsd:string	Y	5	Value assigned by Comdata
custId	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
hubometerStart	xsd:string	N	6	Hubometer Start Value
hubometerEnd	xsd:string	N	6	Hubometer End Value
unitStatus	xsd:string	N	1	R = Unblocking the unit X = Blocking the unit
onetimeProximityOverrideFlag	xsd:string	N	1	This should be either 'Y' or 'N' or 'Empty'. When this option is used, then other fields (VIN, vehicleNumber, etc.) should not be sent in the request for update. Y - Unit is using Proximity telematics profile N - Unit is not using Proximity telematics profile
</record>				
</VehicleIdUpdateRequest>				

Response Record – Update Vehicle ID

<VehicleIdUpdateResponse >			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	Description of the response code
</VehicleIdUpdateResponse>			

Sample ResponseCodes/Messages

Response Code	Response Message (display)	Reason
0	1) OK. 2) Success. One-time Proximity telematics profile override. 3) Success. One-time Proximity telematics profile override removed.	1) When updation done for the provided input fields. 2) If we are passing 'onetimeProximityOverrideFlag' value as 'Y' and getting the 'AdhereToProfile' field value as 'Y' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value. 3) If we are passing 'onetimeProximityOverrideFlag' value as 'N' and getting the

Response Code	Response Message (display)	Reason
		'AdhereToProfile' field value as '1' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value.
99903	1) Vehicle Id Should not be greater than 10 Characters. 2) Vehicle VIN Should not be greater than 30 Characters. 3) Vehicle Description Should not be greater than 30 Characters. 4) Vehicle License Number Should not be greater than 15 Characters. 5) Expiration Date Should not be greater than 7 Characters. 6) Account Code Should not be greater than 5 Characters. 7) Customer Id Should not be greater than 10 Characters. 8) One-time proximity override flag value should not be greater than 1 Character.	1) If passing more than 10-character value for vehicleId field. 2) If passing more than 30-character value for vinNumber field. 3) If passing more than 30-character value for vehicleDescription field. 4) If passing more than 15-character value for licenseNumber field. 5) If passing more than 7-character value for expirationDate field. 6) If passing more than 5-character value for acctNbr field. 7) If passing more than 10-character value for custId field. 8) If passing more than 1 character value for onetimeProximityOverrideFlag field.
99920	Unit is not using proximity telematic profile.	If we are passing 'onetimeProximityOverrideFlag' value as 'Y' OR 'N' and getting the 'AdhereToProfile' field value as 'N' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value.
99921	One-time proximity telematics override already set.	If we are passing 'onetimeProximityOverrideFlag' value as 'Y' and getting the 'AdhereToProfile' field value as '1' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value.
99923	One-time proximity telematics override is not set.	If we are passing 'onetimeProximityOverrideFlag' value as 'N' and getting the

Response Code	Response Message (display)	Reason
		'AdhereToProfile' field value as 'Y' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value.
99999	An error has occurred.	This error will occur in case of database connection issue or any unwanted error.

Update Vehicle ID V02

The Update Vehicle ID V02 request is used to change information for a pooled vehicle (unit). This request mirrors the update function in the PS14 batch file process.

Function:	Update Vehicle ID V02
Web Service Method:	updateVehicleIdV02
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Update Vehicle ID V02

<VehicleIdUpdateRequestV02>				
<record>				
Element Name	Data Type	Req	Max Len	Comment / Example Value
vehicleId	xsd:string	Y	10	Also referred to as Vehicle Number, Unit ID, or Unit Number; this value must be 10 digits or less in the web service request and not ≤ 17 digits as in the PS14 batch file process
vinNumber	xsd:string	N	30	The unique number used in the automotive industry to identify motor vehicles
vehicleDescription	xsd:string	N	30	Free-form description of the vehicle (unit)
licenseNumber	xsd:string	N	20	Vehicle license number of ≤ 20 alphanumeric characters
expirationDate	xsd:string	N	7	YYYY-MM (Year-Month)
miscData1	xsd:string	N	20	Miscellaneous storage field
miscData2	xsd:string	N	20	Miscellaneous storage field
acctNbr	xsd:string	Y	5	Value assigned by Comdata
custId	xsd:string	Y	5	Customer ID assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
hubometerStart	xsd:string	N	6	Hubometer Start Value
hubometerEnd	xsd:string	N	6	Hubometer End Value
unitStatus	xsd:string	N	1	R = Unblocking the unit X = Blocking the unit

onetimeProximityOverrideFlag	xsd:string	N	1	This should be either 'Y' or 'N' or 'Empty'. When this option is used, then other fields (VIN, vehicleNumber, etc.) should not be sent in the request for update. Y - Unit is using Proximity telematics profile N - Unit is not using Proximity telematics profile
miscData3	xsd:string	N	15	Miscellaneous 3 storage field
tankCapacity	xsd:string	N	10	Tank Capacity of the vehicle/unit.
profileId	xsd:string	N	5	Profile Id of the vehicle/unit.
deviceId	xsd:string	N	30	Device Id of the vehicle/unit.
</record>				
</VehicleIdUpdateRequestV02>				

Response Record – Update Vehicle ID V02

<VehicleIdUpdateResponse >			
Element Name	Data Type	Max Len	Comment / Example Value
numberChanges	xsd:int	5	Number of records updated
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	Description of the response code
</VehicleIdUpdateResponse>			

Sample ResponseCodes/Messages

Response Code	Response Message (display)	Reason
0	1) OK. 2) Success. One-time Proximity telematics profile override. 3) Success. One-time Proximity telematics profile override removed.	1) When updation done for the provided input fields. 2) If we are passing 'onetimeProximityOverrideFlag' value as 'Y' and getting the 'AdhereToProfile' field value as 'Y' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value. 3) If we are passing 'onetimeProximityOverrideFlag' value as 'N' and getting the 'AdhereToProfile' field value as '1' after doing inquiry using MQ 41 call for this field. 'onetimeProximityOverrideFlag' when going to update this field value.
99903	1) Vehicle Id Should not be greater than 10 Characters.	1) If passing more than 10-character value for vehicleId field.

Response Code	Response Message (display)	Reason
	2) Vehicle VIN Should not be greater than 30 Characters. 3) Vehicle Description Should not be greater than 30 Characters. 4) Vehicle License Number Should not be greater than 15 Characters. 5) Expiration Date Should not be greater than 7 Characters. 6) Account Code Should not be greater than 5 Characters. 7) Customer Id Should not be greater than 10 Characters. 8) One-time proximity override flag value should not be greater than 1 Character. 9) Misc Data 3 should not be greater than 15 characters. 10) Tank Capacity must be a numeric value. 11) Invalid profile id value. 12) Device Id should not be greater than 30 characters.	2) If passing more than 30-character value for vinNumber field. 3) If passing more than 30-character value for vehicleDescription field. 4) If passing more than 15-character value for licenseNumber field. 5) If passing more than 7-character value for expirationDate field. 6) If passing more than 5-character value for acctNbr field. 7) If passing more than 10-character value for custId field. 8) If passing more than 1 character value for onetimeProximityOverrideFlag field. 9) If passing more than 15-character value for miscData3 field. 10) If passing the alphanumeric and decimal value for tankCapacity field. 11) If passing the profileId field value is less than 5 digits and that profileId value does not mapped/belong to the provided custId value. 12) If passing more than 30-character value for deviceId field.
99920	Unit is not using proximity telematic profile.	If we are passing 'onetimeProximityOverrideFlag' value as 'Y' OR 'N' and getting the 'AdhereToProfile' field value as 'N' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value.
99921	One-time proximity telematics override already set.	If we are passing 'onetimeProximityOverrideFlag' value as 'Y' and getting the 'AdhereToProfile' field value as '1' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value.

Response Code	Response Message (display)	Reason
99923	One-time proximity telematics override is not set.	If we are passing 'onetimeProximityOverrideFlag' value as 'N' and getting the 'AdhereToProfile' field value as 'Y' after doing inquiry using MQ 41 call for this field 'onetimeProximityOverrideFlag' when going to update this field value.
99999	An error has occurred.	This error will occur in case of database connection issue or any unwanted error.

Real Time Transaction History

The Real Time Transaction History request pulls a real-time record of all card transactions under the user's Account ID and any Customer IDs to which they have access. The history is limited to a 45-day window and cannot be older than 14 months from the search date. Results can be filtered by search criteria including a specific customer ID, card number, one or more transaction statuses, and a start date and/or end date, among others.

To access this web service, users must be flagged in iConnectData under the Reporting Registration Module. The flag is Real-Time Transaction History Web Service.

Function:	Real Time Transaction History
Web Service Method:	realTimeTransactionHistory
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost) ☐ Comdata Virtual MasterCards
Other Notes:	This web service replicates the functionality of the Real Time Transaction History in iConnectData. The web service also adds two new functions: StartTime/End Time and the ability to specify multiple search criteria.

Request Record – Real Time Transaction History

Element Name	Data Type	Req	Max Len	Comment/ Example Value
<main: RTTransactionRequest>				
<criteria>				
accountCode	xsd: string	Y	5	Alphanumeric value assigned by Comdata
customerId	xsd: string	N	5	4- or 5-digit Customer ID assigned by Comdata (4-digit Customer IDs should include a leading zero). Up to 500 Customer IDs to which the user has access can be added to a request.

Element Name	Data Type	Req	Max Len	Comment/ Example Value
cardNumber	xsd: string	N	16	Entering a card number will return all transactions within the designated time frame if the user has access to that Customer ID
cardToken	xsd: string	N	10	Alphanumeric. Entering a card token returns the same history as the entering the associated card number.
employeeVehicleNumber	xsd: string	N	7	Search by a vehicle number associated with the card. Alphanumeric.
employeeLastName	xsd: string	N	20	Search by value assigned to the Last Name field for the card or cards
employeeFirstName	xsd: string	N	15	Search by value assigned to the First Name field for the card or cards
transactionStatus	xsd: string	N	10	Enter one or more of the following transaction statuses to limit search results: • All • Authorized • Posted • Declined • Credit Note: The value entered must match one of the options shown above. This field is case sensitive.
sortByDateType	xsd: string	Y	15	Select Transaction or Posted as the date type to sort your results. The default setting is transaction. Note: This field is case sensitive.
selectionDateType	xsd: string	Y	15	Select the date type, Transaction or Posted , used in your search. The default setting is transaction. Note: This field is case sensitive.
startDate	xsd: string	Y	10	YYYY-MM-DD Enter an end date also unless your start date is within 45 days of the current date.
startTime	xsd: string	N	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds Example: Enter 13:30:00 for 1:30 pm (and 0 seconds)
endDate	xsd: string	N	10	YYYY-MM-DD This entry cannot be older than 14 months before the current date. If your Start Date is more that 45 days before the current date, you must include an End Date.
endTime	xsd: string	N	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds Example: Enter 13:30:00 for 1:30 pm
pageNbr	xsd: string	N	6	Searches return up to 10,000 records per page. Searches with > 10,000 results are divided into pages. Enter a page number greater than one to see these additional pages.
</criteria>				
</main: RTTransactionRequest>				

Response Record – Real Time Transaction History

Element Name	Data Type	Max Len	Comment / Example Value
<pageCount>	xsd: string	1	Total number of pages returned for this search
<pageNbr>	xsd: string	6	Current page number displayed
<recordCount>	xsd: string	5	Number of records on the page; up to 10,000 records per page
<records>			
<RtTransactionRecord>			
accountCode	xsd: string	5	5-digit alphanumeric account code
customerId	xsd: string	5	4- or 5-digit customer ID under which the card was assigned
customerName	xsd: string	30	Name associated with the account
corporateCode	xsd: string	14	Alphanumeric. This field will be blank unless the account falls under a corporate ID.
transactionDate	xsd: string	10	YYYY-MM-DD If the transaction has posted, this information matches the Posted Date field
transactionTime	xsd: string	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds If this transaction has posted, this information matches the Posted Time field
postedDate	xsd: string	10	YYYY-MM-DD If the transaction has not posted (i.e., it is still Authorized or Declined), this field will be blank
postedTime	xsd: string	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds If the transaction has not posted (i.e., it is still Authorized or Declined), this field will be blank
transactionStatus	xsd: string	10	• Authorized • Posted • Declined • Credit
cardNumber	xsd: string	16	16-digit card number
cardholderName	xsd: string	30	Name associated with the card; first name followed by last name
cardExpireDate	xsd: string	4	4-digit card expiration date in MMY format
declineCode	xsd: string	5	Numeric (0-9). Code for a declined transaction.
declineMessage	xsd: string	60	Message explaining the decline code, if applicable
correctiveAction	xsd: string	90	Message describing the suggested action in response to the decline code
promptedID	xsd: string	16	≤ 16-digit ID number that can authorize a transaction or show what is entered at the POS (like a PIN)
mccGroup	xsd: string	5	Merchant Category Code group
mccNumber	xsd: string	4	4-digit Merchant Category Code for the merchant receiving the payment
mccDescription	xsd: string	70	Message identifying the MCC

Element Name	Data Type	Max Len	Comment / Example Value
merchantName	xsd: string	50	The merchant receiving the card payment
merchantAddress	xsd: string	50	Physical street address for the merchant
merchantCity	xsd: string	50	City for the merchant
merchantState	xsd: string	3	State/province for the merchant
merchantZIP	xsd: string	10	Postal code for the merchant
acceptLocation	xsd: string	40	Merchant information from their POS device
preAuthAmount	xsd: string	15	If the authorized amount is a credit, the value will be preceded by a minus sign (for example, -26.31)
postedAmount	xsd: string	15	The amount in US dollars and cents posted in the transaction (for example, 26.31)
approvalCode	xsd: string	10	Authorization number given for the transaction
reversalflag	xsd: string	1	Y (Yes) or N (No) Indicates if the transaction was a reversal
idMatchNumber	xsd: string	10	Transaction ID match to cross reference authorization and posted data
</RTTransactionResponse>			

Real Time Transaction History 2

The Real Time Transaction History 2 request pulls a real-time record of all card transactions under the user's account ID and any customer IDs to which they have access. The history is limited to a 45-day window and cannot be older than 14 months from the search date. Results can be filtered by search criteria including a specific customer ID, card number, one or more transaction statuses, and a start date and/or end date, among others.

To access this web service, users must be flagged in iConnectData under the Reporting Registration Module. The flag is Real-Time Transaction History Web Service.

Function:	Real Time Transaction History V02
Web Service Method:	realTimeTransactionHistoryV02
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost) ☐ Comdata Virtual MasterCards
Other Notes:	This web service replicates the functionality of the Real Time Transaction History in iConnectData. The web service also adds two new functions: StartTime/End Time and the ability to specify the multiple search criteria.

Request Record – Real Time Transaction History 2

Element Name	Data Type	Required	Max Len	Comment/ Example Value
<main: RTTransactionRequestV02>				

Element Name	Data Type	Required	Max Len	Comment/ Example Value
<criteria>				
accountCode	xsd:string	Y	5	Alphanumeric value assigned by comdata
customerId	xsd:string	N	5	4- or 5-digit customer ID assigned by Comdata (4-digit customer IDs should include a leading zero). Up to 500 customer IDs to which the user has access can be added to a request.
cardNumber	xsd:string	N	16	Entering a card number will return all transactions within the designated time frame if the user has access to that customer ID
cardToken	xsd:string	N	1	Alphanumeric. Entering a card token returns the same history as entering the associated card number
employeeVehicleNumber	xsd:string	N	7	Search by a vehicle number associated with the card. Alphanumeric.
employeeLastName	xsd:string	N	20	Search by value assigned to the Last Name field of the card or cards
employeeFirstName	xsd:string	N	15	Search by the value assigned to the First Name field of the card or cards
transactionStatus	xsd:string	N	10	Enter one or more of the following transaction statuses to limit search results: • All • Authorized • Posted • Declined • Credit Note: The value entered must match one of the options shown above. This field is case sensitive.
sortByDateType	xsd:string	Y	15	Select Transaction or Posted as the date type to sort your results. The default setting is transaction. Note: This field is case sensitive.
selectionDateType	xsd:string	Y	15	Select the date type, Transaction or Posted, used in your search. The default setting is transaction. Note: This field is case sensitive.
startDate	xsd:string	Y	10	YYYY-MM-DD Enter an end date also unless your start date is within 45 days of the current date.
startTime	xsd:string	N	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds Example: Enter 13:30:00 for 1:30 pm (and 0 seconds)
endDate	xsd:string	N	10	YYYY-MM-DD This entry cannot be older than 14 months before the current day. If your Start Date is more than 45 days before the current date, you must include an End Date.
endTime	xsd:string	N	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds Example: Enter 13:30:00 for 1:30 pm (and 0 seconds)

Element Name	Data Type	Required	Max Len	Comment/ Example Value
pageNbr	xsd:string	N	6	Searches return up to 10,000 records per page. Searches with > 10,000 results are divided into pages. Enter a page number greater than one to see these additional pages.
</criteria>				
</main: RTTransactionRequestV02>				

Response Record – Real Time Transaction History V02

Element Name	Data Type	Max Length	Comment / Example Value
<pageCount>	xsd: string	1	Total number of pages returned for this search
<pageNbr>	xsd: string	6	Current page number displayed
<recordCount>	xsd: string	5	Number of records on the page; up to 10,000 records per page
<records>			
<RtTransactionRecordV02>			
accountCode	xsd: string	5	5-digit alphanumeric code
customerID	xsd: string	5	4- or 5-digit customer ID under which the card was assigned
idMatchNumber	xsd: string	10	Transaction ID match to cross reference authorization and posted data
customerName	xsd: string	30	Name associated with the account
corporateCode	xsd: string	14	Alphanumeric. This field will be blank unless the account falls under a corporate ID.
transactionDate	xsd: string	10	YYYY-MM-DD If the transaction has posted, this information matches the Posted Date field.
transactionTime	xsd: string	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds If this transaction has posted, this information matches the Posted Time field.
postedDate	xsd: string	10	YYYY-MM-DD If the transaction has not posted (i.e., it is still Authorized or Declined), this field will be blank
postedTime	xsd: string	8	YYYY-MM-DD If the transaction has not posted (i.e., it is still Authorized or Declined), this field will be blank
transactionStatus	xsd: string	10	• Authorized • Posted • Declined • Credit
cardNumber	xsd: string	16	16-digit card number
cardholderName	xsd: string	30	Name associated with the card; first name followed by last name
cardExpireDate	xsd: string	4	4-digit card expiration date in MMY format
declineCode	xsd: string	5	Numeric (0-9). Code for a declined transaction
declineMessage	xsd: string	60	Message describing the decline code, if applicable
correctiveAction	xsd: string	90	Message describing the suggested action in response to the decline code

Element Name	Data Type	Max Length	Comment / Example Value
promptedID	xsd: string	16	≤ 16-digit ID number that can authorize a transaction or show what is entered at the POS (like a PIN)
mccGroup	xsd: string	5	Merchant Category Code group
mccNumber	xsd: string	4	4-digit Merchant Category Code for the merchant receiving the payment
mccDescription	xsd: string	70	Message identifying the MCC
merchantName	xsd: string	50	The merchant receiving the card payment
merchantAddress	xsd: string	50	Physical street address for the merchant
merchantCity	xsd: string	50	City for the merchant
merchantState	xsd: string	3	State/province for the merchant
merchantZIP	xsd: string	10	Postal code for the merchant
acceptLocation	xsd: string	40	Merchant information from their POS device
preAuthAmount	xsd: string	15	If the authorized amount is credit, the value will be preceded by a minus sign (for example, -26.31)
postedAmount	xsd: string	15	The amount in US dollars and cents posted in the transaction (for example, 26.31)
approvalCode	xsd: string	10	Authorization number given for the transaction
reversalFlag	xsd: string	1	Y (Yes) or N (No). Indicates if the transaction was a reversal
latitude	xsd: string	15	Latitude of the merchant *Note: Future field not fully available yet.
longitude	xsd: string	15	Longitude of the merchant *Note: Future field not fully available yet.
employeeNumber	xsd: string	16	The employee number associated with the cardNumber
</RTTransactionResponseV02>			

Real Time Transaction History 3

The Real Time Transaction History 3 request pulls a real-time record of all card transactions under the user's account ID and any customer IDs to which they have access. The history is limited to a 45-day window and cannot be older than 14 months from the search date. Results can be filtered by search criteria including a specific customer ID, card number, one or more transaction statuses, and a start date and/or end date, among others.

To access this web service, users must be flagged in iConnectData under the Reporting Registration Module. The flag is Real-Time Transaction History Web Service.

Function:	Real Time Transaction History V03
Web Service Method:	realTimeTransactionHistoryV03
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost) ☐ Comdata Virtual MasterCards
Other Notes:	This web service replicates the functionality of the Real Time Transaction History in iConnectData. The web service also adds two new functions: StartTime/End Time and the ability to specify the multiple search criteria.

Request Record – Real Time Transaction History 3

Element Name	Data Type	Req	Max Len	Comment/ Example Value
<main: RTTransactionRequestV03>				
<criteria>				
accountCode	xsd:string	Y	5	Alphanumeric value assigned by comdata
customerId	xsd:string	N	5	4- or 5-digit customer ID assigned by Comdata (4-digit customer IDs should include a leading zero). Up to 500 customer IDs to which the user has access can be added to a request.
cardNumber	xsd:string	N	16	Entering a card number will return all transactions within the designated time frame if the user has access to that customer ID
cardToken	xsd:string	N	1	Alphanumeric. Entering a card token returns the same history as entering the associated card number
employeeVehicleNumber	xsd:string	N	7	Search by a vehicle number associated with the card. Alphanumeric.
employeeLastName	xsd:string	N	20	Search by value assigned to the Last Name field of the card or cards
employeeFirstName	xsd:string	N	15	Search by the value assigned to the First Name field of the card or cards

Element Name	Data Type	Req	Max Len	Comment/ Example Value
transactionStatus	xsd:string	N	10	Enter one or more of the following transaction statuses to limit search results: • All • Authorized • Posted • Declined • Credit Note: The value entered must match one of the options shown above. This field is case sensitive.
sortByDateType	xsd:string	Y	15	Select Transaction or Posted as the date type to sort your results. The default setting is transaction. Note: This field is case sensitive.
selectionDateType	xsd:string	Y	15	Select the date type, Transaction or Posted , used in your search. The default setting is transaction. Note: This field is case sensitive.
startDate	xsd:string	Y	10	YYYY-MM-DD Enter an end date also unless your start date is within 45 days of the current date.
startTime	xsd:string	N	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds Example: Enter 13:30:00 for 1:30 pm (and 0 seconds)
endDate	xsd:string	N	10	YYYY-MM-DD This entry cannot be older than 14 months before the current day. If your Start Date is more than 45 days before the current date, you must include an End Date.
endTime	xsd:string	N	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds Example: Enter 13:30:00 for 1:30 pm (and 0 seconds)
pageNbr	xsd:string	N	6	Searches return up to 10,000 records per page. Searches with > 10,000 results are divided into pages. Enter a page number greater than one to see these additional pages.
</criteria>				
</main: RTTransactionRequestV03>				

Response Record – Real Time Transaction History V03

Element Name	Data Type	Max Length	Comment / Example Value
<pageCount>	xsd: string	1	Total number of pages returned for this search
<pageNbr>	xsd: string	6	Current page number displayed
<recordCount>	xsd: string	5	Number of records on the page; up to 10,000 records per page
<records>			
<RtTransactionRecordV03>			
accountCode	xsd: string	5	5-digit alphanumeric code

Element Name	Data Type	Max Length	Comment / Example Value
customerID	xsd: string	5	4- or 5-digit customer ID under which the card was assigned
idMatchNumber	xsd: string	10	Transaction ID match to cross reference authorization and posted data
customerName	xsd: string	30	Name associated with the account
corporateCode	xsd: string	14	Alphanumeric. This field will be blank unless the account falls under a corporate ID.
transactionDate	xsd: string	10	YYYY-MM-DD If the transaction has posted, this information matches the Posted Date field.
transactionTime	xsd: string	8	HH:MM:SS where "H" = hour, "M" = minutes, and "S" = seconds If this transaction has posted, this information matches the Posted Time field.
postedDate	xsd: string	10	YYYY-MM-DD If the transaction has not posted (i.e., it is still Authorized or Declined), this field will be blank
postedTime	xsd: string	8	YYYY-MM-DD If the transaction has not posted (i.e., it is still Authorized or Declined), this field will be blank
transactionStatus	xsd: string	10	• Authorized • Posted • Declined • Credit
cardNumber	xsd: string	16	16-digit card number
cardholderName	xsd: string	30	Name associated with the card; first name followed by last name
cardExpireDate	xsd: string	4	4-digit card expiration date in MMY format
declineCode	xsd: string	5	Numeric (0-9). Code for a declined transaction
declineMessage	xsd: string	60	Message describing the decline code, if applicable
correctiveAction	xsd: string	90	Message describing the suggested action in response to the decline code
promptedID	xsd: string	16	≤ 16-digit ID number that can authorize a transaction or show what is entered at the POS (like a PIN)
mccGroup	xsd: string	5	Merchant Category Code group
mccNumber	xsd: string	4	4-digit Merchant Category Code for the merchant receiving the payment
mccDescription	xsd: string	70	Message identifying the MCC
merchantName	xsd: string	50	The merchant receiving the card payment
merchantAddress	xsd: string	50	Physical street address for the merchant
merchantCity	xsd: string	50	City for the merchant
merchantState	xsd: string	3	State/province for the merchant
merchantZIP	xsd: string	10	Postal code for the merchant
acceptLocation	xsd: string	40	Merchant information from their POS device
preAuthAmount	xsd: string	15	If the authorized amount is credit, the value will be preceded by a minus sign (for example, -26.31)
postedAmount	xsd: string	15	The amount in US dollars and cents posted in the transaction (for example, 26.31)
approvalCode	xsd: string	10	Authorization number given for the transaction

Element Name	Data Type	Max Length	Comment / Example Value
reversalFlag	xsd: string	1	Y (Yes) or N (No). Indicates if the transaction was a reversal
latitude	xsd: string	15	Latitude of the merchant *Note: Future field not fully available yet.
longitude	xsd: string	15	Longitude of the merchant *Note: Future field not fully available yet.
employeeNumber	xsd: string	16	The employee number associated with the cardNumber
posEMode	xsd:string	5	POS entry mode
posEModeDesc	xsd:string	30	POS entry description
acceptorId	xsd:string	15	Acceptor ID
</RTTransactionResponseV03>			

Recycle Card Limits

The Recycle Card Limits request is used to recycle/reset any spending limit associated with that card.

Function:	Recycle Card Limits
Web Service Method:	recycleCardLimits
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Recycle Card Limit

<RecycleCardLimitRequest>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
accountCode	xsd:string	Y	5	Value assigned by Comdata
customerId	xsd:string	Y	5	Value assigned by Comdata (4-digit customer IDs will include a leading zero)
cardIdentifier	xsd:string	Y	16	Card number, card token, or employee number
cardIdentifierType	xsd:string	Y	1	C = Card number T = Card token E = Employee number
</RecycleCardLimitRequest>				

Response Record – Recycle Card Limit

<RecycleCardLimitResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
responseCode	xsd: string	5	0=Update Complete Anything Else=Error
responseMessage	xsd: string	80	Response Description
</RecycleCardLimitResponse>			

MasterCard Intraday

The MasterCard Intraday request allows customers to retrieve new MasterCard transactions that have occurred since the time of their last request. This allows for review of new transactions without the burden of processing previously retrieved transactions. The response record includes transactions authorized at the point of sale (POS), declines at the POS, settlements (posted), and credits.

Function:	MasterCard Intraday Request
Web Service Method:	IntradayRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost) ☐ Comdata virtual MasterCards
Other Notes:	This service is not intended to be an alternative delivery method for batch reconciliation files (AC29/AC30), which contain full details for settled transactions. It is intended to be used as notification of transaction events (authorizations, declines, posting, credits) and associated key data elements. Transactions older than 7 days are purged from the Intraday database and will not be available for retrieval by this service. Internal Comdata Note: To access the MasterCard Intraday web service, users must be flagged in iConnectData under the Registration Module for Web Services.

Request Record – MasterCard Intraday Request

<main:IntradayRequest>				
<criteria>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
maxRows	xsd:string	N	5	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
startDate	xsd:string	N	10	YYYY-MM-DD Optional field which allows the reselection of transactions older than the most recent retrieval. Note: Use of this field does not adjust the most recently retrieved transaction timestamp.
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); the default is N Masked card numbers appear as follows: 123456XXXXXX1234
pageNbr	xsd:string	N	6	Searches can return up to 10,000 records per page (or maxRows). Searches greater than maxRows are divided into pages. Enter a page number greater than 1 to see these additional pages.
detailType	xsd:string	N	2	*Note: Product Details is a future feature that is not fully available yet. PD = Product Details level data will be provided. If blank, then only regular MasterCard Intraday fields will be returned.
</criteria>				
</main:IntradayRequest>				

Response Record – MasterCard Intraday Request

Element Name	Data Type	Max Len	Comment / Example Value
<pageCount>	xsd: int	6	Total number of pages returned for this search
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<records>			
<IDTransactionRecord>			
accountCode	xsd:string	5	5-digit alphanumeric account code
customerID	xsd:string	5	4- or 5-digit customer ID under which the card was assigned
customerName	xsd:string	30	Name associated with the account
corporateCode	xsd:string	14	Alphanumeric. This field will be blank unless the account falls under a corporate ID.
transactionDate	xsd:string	10	YYYY-MM-DD If the transaction has posted, this information matches the Posted Date field
transactionTime	xsd:string	8	HH:MM:SS H = hour between 1 and 23; m = minutes; s = seconds
postedDate	xsd:string	10	YYYY-MM-DD *Note: Posting only field.
postedTime	xsd:string	8	HH:MM:SS H = hour between 1 and 23; m = minutes; s = seconds *Note: Posting only field
transactionType	xsd:string	10	- Authorized - Declined - Posted - Credit
cardNumber	xsd:string	16	16-digit card number (number masked if maskCardFlag flagged "Y" in the request; for example, "999999XXXXXX9999")
cardholderName	xsd:string	30	Name associated with the card; first name followed by last name
cardExpireDate	xsd:string	4	4-digit card expiration date in MMY format
declineCode	xsd:string	5	Numeric (0-9). Code for a declined transaction.
declineMessage	xsd:string	60	Message explaining the decline code, if applicable
correctiveAction	xsd:string	90	Message describing the suggested action in response to the decline code
promptedID	xsd:string	16	≤ 16-digit ID number that can authorize a transaction or show what is entered at the POS (like a PIN)
mccGroup	xsd:string	5	Merchant Category Code group
mccNumber	xsd:string	4	4-digit Merchant Category Code for the merchant receiving the payment
mccDescription	xsd:string	70	Message identifying the MCC
merchantName	xsd:string	50	The merchant receiving the card payment
merchantAddress	xsd:string	50	Physical street address for the merchant
merchantCity	xsd:string	50	City for the merchant
merchantState	xsd:string	3	State/province for the merchant

Element Name	Data Type	Max Len	Comment / Example Value
merchantZIP	xsd:string	10	Postal code for the merchant
acceptLocation	xsd:string	40	Merchant information from their POS device
preAuthAmount	xsd:string	15	If the authorized amount is a credit, the value will be preceded by a minus sign (for example, -26.31)
postedAmount	xsd:string	15	The amount in US dollars and cents posted in the transaction (for example, 26.31) *Note: Posting only field.
approvalCode	xsd:string	10	Authorization number given for the transaction
reversalFlag	xsd:string	1	Y (Yes) or N (No) Indicates if the transaction is an authorization reversal.
cardToken	xsd:string	10	Alphanumeric
surcharge	xsd:string	9	Surcharge amount
posEModeDesc	xsd:string	30	The point of sale entry mode description: UNKNOWN KEYED TRANSACTION SWIPED TRX. ON OUTDATED POS SWIPED TRX. VIA OCR SWIPED TRX. VIA CHIP MANUAL ENTRY OF CHIP CARD CHIP CRD DEFAULT TO MAG STRIPE ECOMMERCE SWIPED TRANSACTION COMDATA MANUAL AUTHORIZATION
idMatchNumber	xsd:string	10	Transaction ID match to cross reference authorization records, posted records and reconciliation records (AC files)
employeeNumber	xsd:string	16	Employee number assigned to card
VINNumber	xsd:string	30	VIN # *Note: Future field. Not fully available yet.
POSFirstName	xsd:string	15	POS First Name *Note: Future field. Not fully available yet.
POSLastName	xsd:string	20	POS Last Name *Note: Future field. Not fully available yet.
merchantAddress2	xsd:string	40	Vendor Address 2 *Note: Future field. Not fully available yet.
misc1	xsd:string	15	Misc 1 *Note: Future field. Not fully available yet.
misc2	xsd:string	15	Misc 2 *Note: Future field. Not fully available yet.
transactionFees	xsd:double	8	Transaction Fees *Note: Future field. Not fully available yet.
vehicleNumber	xsd:string	17	Vehicle Number *Note: Future field. Not fully available yet.
latitude	xsd:string	15	Latitude of the merchant *Note: Future field. Not fully available yet.
longitude	xsd:string	15	Longitude of the merchant *Note: Future field. Not fully available yet.
<Product Detail>			

Element Name	Data Type	Max Len	Comment / Example Value
*Note: All fields below are future fields that are not fully available yet.			
transactionIdentifier	xsd:string	7	Transaction Identifier
productCode	xsd:string	15	Product Code
productTypeCode	xsd:string	1	Product Type Code
productDescription	xsd:string	35	Product Description
productQuantity	xsd:double	12	Issue Quantity, AC file lists it as productQuantity
creditOrDebit	xsd:string	1	Credit or Debit – C or D
grossCostPrice	xsd:double	10	Gross Cost Price
basePricePerUnit	xsd:double	5	Base Price Per Unit
productPrice	xsd:double	10	Product Price - Net Due
productTotalCost	xsd:double	9	Product Total Cost - Net Due
taxAmount1	xsd:double	9	Tax Amount 1
taxRate1	xsd:double	5	Tax Rate 1
taxId1	xsd:string	3	Tax ID 1
taxAmount2	xsd:double	9	Tax Amount 2
taxRate2	xsd:double	5	Tax Rate 2
taxId2	xsd:string	3	Tax ID 2
taxAmount3	xsd:double	9	Tax Amount 3
taxRate3	xsd:double	5	Tax Rate 3
taxId3	xsd:string	3	Tax ID 3
merchantDiscountIndicator	xsd:string	1	Merchant Discount Indicator
merchantDiscountAmountNet	xsd:double	9	Merchant Discount amount Net
rebateIndicator	xsd:string	1	Rebate Indicator
rebateAmountNet	xsd:double	9	Rebate amount Net
unitOfMeasure	xsd:string	1	Unit Of Measure
odometerReading	xsd:double	7	Odometer Reading
</ProductDetail>			
</IDTransactionRecord>			
</records>			
responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicate errors
responseDescription	xsd:string	80	Description of the response code
</IntradayResponse>			

One-Time Purchase Override

The One-Time Purchase Override request is used to make the next card purchase happen without card limits being applied.

Function:	One-Time Purchase Override
Web Service Method:	oneTimePurchaseOverride
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – One Time Purchase Override

<oneTimePurchaseOverrideRequest>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
accountCode	xsd: string	Y	5	Value assigned by Comdata
customerId	xsd: string	Y	5	Value assigned by Comdata (4-digit Customer IDs will include a leading zero)
cardIdentifier	xsd:string	Y	16	Card number, card token, or employee number
cardidentifierType	xsd:string	Y	1	C = Card number T = Card token E = Employee number
oneTimePurchaseAmount	xsd:decimal	Y	10	The amount to add for the One-Time Purchase: 99999999.99
</OneTimePurchaseOverrideRequest>				

Response Record – One Time Purchase Override

<oneTimePurchaseOverrideResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
responseCode	xsd: string	5	0=Update Complete Anything Else=Error
responseMessage	xsd: string	80	Response Description
</OneTimePurchaseOverrideResponse>			

Card Listing

The Card Listing request pulls a record of cards for one or more account codes and/or customer IDs. Results can be filtered by card status (e.g., Active or Blocked). The card list can be generated using masked card numbers or card tokens, if available.

Function:	Card Listing
Web Service Method:	CardListingRequest
Applicable Card Type:	☐ Comdata MasterCards (physical & ghost)
Other Notes:	

Request Record – Card Listing

Element Name	Data Type	Req	Max Len	Comment/ Example Value
<main:CardListingRequest>				
<accountCustidList>				
<acctCustidElement> (up to 20 repetitions)				
accountCode	xsd: string	N	5	Alphanumeric value assigned by Comdata; up to 20 account codes can be submitted in a single request
<custIdList> (up to 20 repetitions)				
customerID	xsd: string	N	5	4- or 5-digit Customer ID assigned by Comdata (4-digit Customer IDs should include a leading zero). For account codes with 500 or more customer IDs, you must enter between 1 and 20 customer IDs
</custIdList>				
</acctCustidElement>				
</accountCustidList>				
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); the default is N Note: The mask card setting at the user level overrides this selection
status	xsd:string	N	1	A = active; B = blocked; C = clear; F = fraud; L = lost; S = stolen; X = permanent block; the default is all statuses
sortOption	xsd:string	N	1	C = sort by card number; T = sort by token; default is C
maxRows	xsd:string	N	6	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
pageNumber	xsd: string	N	6	Number of the page to display
</main: CardListingRequest>				

Response Record – Card Listing

Element Name	Data Type	Max Len	Comment / Example Value
<CardListingResponse>			
<pageCount>	xsd: int	6	Total number of pages returned for this search
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<records>			
<card>			
accountCode	xsd: string	5	5-digit alphanumeric account code
customerID	xsd: string	5	4- or 5-digit customer ID under which the card was assigned
cardNumber	xsd:string	16	16-digit card number (number masked if maskCardFlag flagged "Y" in the request; for example, "999999XXXXX9999")
cardToken	xsd: string	10	Alphanumeric
expirationYYMM	xsd:string	4	Reserved for future use
cardStatus	xsd:string	1	A = active; B = blocked; C = clear; F = fraud; L = lost; S = stolen
firstName	xsd:string	15	First name or other identifier assigned to this field
lastName	xsd:string	20	Last name or other identifier assigned to this field
employeeID	xsd:string	16	Employee number assigned to this card
addDate	xsd:date	10	Date card was created; YYYY-MM-DD
misc1	xsd:string	20	Miscellaneous storage field
misc2	xsd:string	20	Miscellaneous storage field
vehicleNumber	xsd:string	17	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 6
vehicleDesc	xsd:string	30	Brief, free-form description of a vehicle
vin	xsd:string	30	Vehicle's VIN (Vehicle Identification Number)
vehicleLicense	xsd:string	15	Vehicle license plate number
mailName	xsd:string	30	Company name
mailAttention	xsd:string	30	Attention to person
mailAddress1	xsd:string	30	Mailing address line 1
mailAddress2	xsd:string	30	Mailing address line 2
mailCity	xsd:string	20	Mailing city
mailState	xsd:string	2	2-letter abbreviation for the state (US) or province (Canada)
mailZipCode	xsd:string	10	Mailing zip code
</card>			
</records>			
</CardListingResponse>			

Card Listing Request Record – Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:main="http://fleetCredit02.comdata.com/maintenance/">
  <soapenv:Header />
  <soapenv:Body>
    <main:CardListingRequest>
      <acctCustidList>
        <acctCustidElement>
          <accountCode>ACCT123</accountCode>
          <custIdList>
            <customerId>CUST123</customerId>
          </custIdList>
        </acctCustidElement>
      </acctCustidList>
      <maskCardFlag>Y</maskCardFlag>
      <status>A</status>
      <sortOption>C</sortOption>
      <maxRows>10</maxRows>
      <pageNumber>1</pageNumber>
    </main:CardListingRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

Card Listing V02

The Card Listing V02 request pulls a record of cards (and limits) for one or more account codes and/or customer IDs. Results can be filtered by card status (e.g., Active or Blocked). The card list can be generated using masked card numbers or card tokens, if available.

Along with the card listing information, this operation provides a card's limit information normally available via the Inquire Card operation.

Function:	Card Listing V02
Web Service Method:	CardListingRequestV02
Applicable Card Type:	☐ Comdata Mastercard (physical & ghost)
Other Notes:	

Request Record – Card Listing V02

Element Name	Data Type	Req	Max Len	Comment/ Example Value
<main:CardListingRequestV02>				
<accountCustidList>				
<acctCustidElement> (up to 20 repetitions)				
accountCode	xsd: string	N	5	Alphanumeric value assigned by Comdata; up to 20 account codes can be submitted in a single request
<custIdList> (up to 20 repetitions)				
customerID	xsd: string	N	5	4- or 5-digit Customer ID assigned by Comdata (4-digit Customer IDs should include a leading zero). For account codes with 500 or more customer IDs, you must enter between 1 and 20 customer IDs
</custIdList>				
</acctCustidElement>				
</accountCustidList>				
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); default is N Note: The mask card setting at the user level overrides this selection
status	xsd:string	N	1	A = active; B = blocked; C = clear; F = fraud; L = lost; S = stolen; X = permanent block; default is all statuses
sortOption	xsd:string	N	1	C = sort by card number; T = sort by token; default is C
maxRows	xsd:string	N	6	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
pageNumber	xsd: string	N	6	Number of the page to display
</main: CardListingRequestV02>				

Response Record – Card Listing V02

Element Name	Data Type	Max Len	Comment / Example Value
<CardListingResponseV02>			
<pageCount>	xsd: int	6	Total number of pages returned for this search
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<records>			
<card>			
accountCode	xsd: string	5	5-digit alphanumeric account code
customerID	xsd: string	5	4- or 5-digit customer ID under which the card was assigned
cardNumber	xsd:string	16	16-digit card number (number masked if maskCardFlag flagged "Y" in the request; for example, "999999XXXXXX9999")
cardToken	xsd: string	10	Alphanumeric
expirationYYMM	xsd:string	4	Reserved for future use
cardStatus	xsd:string	1	A = active; B = blocked; C = clear; F = fraud; L = lost; S = stolen
firstName	xsd:string	15	First name or other identifier assigned to this field
lastName	xsd:string	20	Last name or other identifier assigned to this field
employeeID	xsd:string	16	Employee number assigned to this card
addDate	xsd:date	10	Date card was created; YYYY-MM-DD
misc1	xsd:string	20	Miscellaneous storage field
misc2	xsd:string	20	Miscellaneous storage field
vehicleNumber	xsd:string	17	Vehicle Number, also known as Unit Number; although 17 characters are permitted, Vehicle Numbers are 6
vehicleDesc	xsd:string	30	Brief, free-form description of a vehicle
vin	xsd:string	30	Vehicle's VIN (Vehicle Identification Number)
vehicleLicense	xsd:string	15	Vehicle license plate number
mailName	xsd:string	30	Company name
mailAttention	xsd:string	30	Attention to person
mailAddress1	xsd:string	30	Mailing address line 1
mailAddress2	xsd:string	30	Mailing address line 2
mailCity	xsd:string	20	Mailing city
mailState	xsd:string	2	2-letter abbreviation for the state (US) or province (Canada)
mailZipCode	xsd:string	10	Mailing zip code
<amountLimits>			
dailyAmountLimit	xsd:decimal	10	Daily card spending limit
dailyAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the day
dailyAmountLimitHold	xsd:decimal	10	Amount authorized for the card but not yet posted for the day
dailyAmountLimitAvailable	xsd:decimal	10	Amount of daily spend limit remaining after posted and authorized Transactions

Element Name	Data Type	Max Len	Comment / Example Value
dailyTxnLimit	xsd:int	6	Daily card transaction limit
dailyTxnLimitUsed	xsd:int	6	Number of transactions posted to the card for the day
dailyTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the day
dailyTxnLimitAvailable	xsd:int	6	Number of daily transactions remaining after posted and authorized transactions
cycleAmountLimit	xsd:decimal	10	Cycle card spending limit
cycleAmountLimitUsed	xsd:decimal	10	Amount posted to the card for the cycle
cycleAmountLimitHold	xsd:decimal	10	Amount authorized but not yet posted for the cycle
cycleAmountLimitAvailable	xsd:decimal	10	Amount of cycle spending limit remaining after posted and authorized transactions
cycleTxnLimit	xsd:int	6	Cycle card transaction limit
cycleTxnLimitUsed	xsd:int	6	Number of card transactions posted for the cycle
cycleTxnLimitHold	xsd:int	6	Number of transactions authorized but not yet posted for the cycle
cycleTxnLimitAvailable	xsd:int	6	Number of cycle transactions remaining after posted and authorized transactions
</amountLimits>			
</card>			
</records>			
</CardListingResponseV02>			

Card Listing V02 Request Record – Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:main="http://fleetCredit02.comdata.com/maintenance/">
  <soapenv:Header />
  <soapenv:Body>
    <main:CardListingRequestV02>
      <acctCustidList>
        <acctCustidElement>
          <accountCode>ACCT123</accountCode>
          <custIdList>
            <customerId>CUST123</customerId>
          </custIdList>
        </acctCustidElement>
      </acctCustidList>
      <maskCardFlag>Y</maskCardFlag>
      <status>A</status>
      <sortOption>C</sortOption>
      <maxRows>10</maxRows>
      <pageNumber>1</pageNumber>
    </main:CardListingRequestV02>
  </soapenv:Body>
</soapenv:Envelope>
```

Card Listing V02 Response Record – Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p228:CardListingResponseV02 xmlns:p228="http://fleetCredit02.comdata.com/maintenance/">
      <pageCount>1</pageCount>
      <pageNbr>1</pageNbr>
      <recordCount>1</recordCount>
      <records>
        <card>
          <accountCode>ACCT123</accountCode>
          <customerId>CUST123</customerId>
          <cardNumber>XXXXXXXXXXXX4444</cardNumber>
          <cardToken>TOKEN</cardToken>
          <expirationYYMM>2201</expirationYYMM>
          <cardStatus>X</cardStatus>
          <firstName>FIRST</firstName>
          <lastName>LAST</lastName>
          <employeeId>EMP123</employeeId>
          <addDate>2018-04-05</addDate>
          <misc1>MISC1</misc1>
          <misc2>MISC2</misc2>
          <vehicleNumber>VEH NUM 123</vehicleNumber>
          <vehicleDesc>VEH DESC</vehicleDesc>
          <vin>VIN123</vin>
        </card>
      </records>
    </p228:CardListingResponseV02>
  </soapenv:Body>
</soapenv:Envelope>
```

```
<vehicleLicense>VEH LIC 123</vehicleLicense>
<mailName>JOE JONES</mailName>
<mailAttention>ATTN COMPANY</mailAttention>
<mailAddress1>ADDRESS 1</mailAddress1>
<mailAddress2>ADDRESS 2</mailAddress2>
<mailCity>CITY</mailCity>
<mailState>STATE</mailState>
<mailZipCode>12345</mailZipCode>
<amountLimits>
  <dailyAmountLimit>10</dailyAmountLimit>
  <dailyAmountLimitUsed>0</dailyAmountLimitUsed>
  <dailyAmountLimitHold>0</dailyAmountLimitHold>
  <dailyAmountLimitAvailable>10</dailyAmountLimitAvailable>
  <dailyTxnLimit>200</dailyTxnLimit>
  <dailyTxnLimitUsed>0</dailyTxnLimitUsed>
  <dailyTxnLimitHold>0</dailyTxnLimitHold>
  <dailyTxnLimitAvailable>200</dailyTxnLimitAvailable>
  <cycleAmountLimit>10</cycleAmountLimit>
  <cycleAmountLimitUsed>0</cycleAmountLimitUsed>
  <cycleAmountLimitHold>0</cycleAmountLimitHold>
  <cycleAmountLimitAvailable>10</cycleAmountLimitAvailable>
  <cycleTxnLimit>400</cycleTxnLimit>
  <cycleTxnLimitUsed>0</cycleTxnLimitUsed>
  <cycleTxnLimitHold>0</cycleTxnLimitHold>
  <cycleTxnLimitAvailable>400</cycleTxnLimitAvailable>
</amountLimits>
</card>
</records>
</p228:CardListingResponseV02>
</soapenv:Body>
</soapenv:Envelope>
```

Customer ID Listing

The Customer ID Listing request pulls information associated with a customer ID including the name, customer ID status, address information, and type of cards associated with the customer ID. The Customer ID Listing can be pulled by submitting: a) one or more account codes, in which case the customer IDs should be omitted in the request; b) one or more customer IDs, in which case the account code or codes should be omitted; c) with both the account code and customer ID left blank, in which case the response includes all account numbers and customer IDs available to the user. This request allows you to delimit the number of records returned with a query.

Function:	Customer ID Listing
Web Service Method:	CustIdListing
Other Notes:	You must issue this request with either: • One or more account codes • One or more customer IDs • No account code and no customer ID You cannot include both an account code and a customer ID

Request Record – Customer ID Listing

Element Name	Data Type	Req	Max Len	Comment/ Example Value
<CustIdListing >				
<CustIdListingRequest>				
<accountCodes>				
accountCodes	xsd: string	N	5	1 or more 5-digit alphanumeric account codes *Omit if you are pulling the list by customer IDs
</accountCodes>				
<custids>				
customerIDs	xsd: string	N	10	1 or more 4- or 5-digit Customer IDs. *Omit if you are pulling the list by account code
</custids>				
maxRows	xsd:string	N	5	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
PageNbr	xsd:string	N	6	Searches can return up to 10,000 records per page (or maxRows). Searches greater than maxRows are divided into pages. Enter a page number greater than 1 to see the additional pages.
</CustIdListingRequest>				
</CustIdListing>				

Response Record – Customer ID Listing

<CustIdListingResponse>			
<CustIdListingReturn>			
Element Name	Data Type	Max Len	Comment / Example Value
<pageCount>	xsd: int	6	Total number of pages returned for this search
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<ArrayOfCustIdListingRecords>			
<CustIdListingRecords>			
accountCode	xsd:string	5	5-digit alphanumeric account code
customerID	xsd:string	10	4- or 5-digit customer ID under which the card was assigned
customerIdName	xsd:string	30	16-digit card number (number masked if maskCardFlag flagged "Y" in the request; for example, "999999XXXXX9999")
customerIdStatus	xsd:string	10	A (Active) B (Blocked) D (Deleted)
customerIdCountry	xsd:string	1	Country Code
customerIdAddress1	xsd:string	30	Mailing address line 1
customerIdAddress2	xsd:string	30	Mailing address line 2
customerIdCity	xsd:string	20	Mailing city
customerIdState	xsd:string	2	2-letter abbreviation for the state (US) or province (Canada)
customerIdZip	xsd:string	10	Mailing zip code or Canadian postal code
customerIdCardType	xsd:string	2	Type of cards associated with this customer ID
customerIdCardStyle	xsd:string	3	Style of cards associated with this customer ID. This value will be available in the future.
customerIdCardExpirationDate	xsd:string	4	YYMM (year/month), default expiration date of the cards for this customer ID
</CustIdListingRecords>			
</ArrayOfCustIdListingRecords>			
responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicate errors
responseDescription	xsd:string	80	Description of response code
</CustIdListingReturn>			
</CustIdListingResponse>			

Proprietary Intraday

The Proprietary Intraday Request allows customers to retrieve new Proprietary transactions that have occurred since the time of their last request. This allows for review of new transactions without the burden of processing previously retrieved transactions. The response record includes transactions authorized at the point of sale, those that have completed settlement (posted), and declined transactions as well. By default, a transaction will not be included in the response record a second time using this inquiry method.

To access the Proprietary Intraday web service, users must be flagged in iConnectData under the Registration Module for Web Services.

Function:	Proprietary Intraday Request
Web Service Method:	ProprietaryIntradayRequest
Applicable Card Type:	Comdata Proprietary Cards (physical & ghost)
Other Notes:	Transactions older than 7 days are purged from the Proprietary Intraday database and will not be available for retrieval by this service.

Request Record – Proprietary Intraday Request

<main: ProprietaryIntradayRequest>				
<criteria>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
maxRows	xsd:string	N	5	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
startDate	xsd:string	N	10	YYYY-MM-DD Optional field which allows the reselection of transactions older than the most recent retrieval. Note: Use of this field does not adjust the most recently retrieved transaction timestamp.
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); the default is N Masked card numbers appear as follows: 123XXXX123
pageNbr	xsd:string	N	6	Searches can return up to 10,000 records per page (or maxRows). Searches greater than maxRows are divided into pages. Enter a page number greater than 1 to see these additional pages.
</criteria>				
</main: ProprietaryIntradayRequest>				

Response Record – Proprietary Intraday Response

Element Name	Data Type	Max Len	Comment / Example Value
<pageCount>	xsd: int	6	Total number of pages returned for this search
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<records>			
<PIDTransactionRecord>			
accountCode	xsd:string	5	5-digit alphanumeric account code
customerID	xsd:string	5	4- or 5-digit customer ID under which the card was assigned
recordIdentifier	xsd:string	2	Constant "01", C1 if Cancelled
cdnCompanyAccountCode	xsd:string	5	CDN Company Accounting Code
fuelBillingFlag	xsd:string	1	Fuel Billing Flag, B = Balanced Based, L=limit based
expressCashBillingFlag	xsd:string	1	Express Cash Billing Flag, L=load, P=pick-up
transactionDate	xsd:string	10	Transaction Date, YYYY-MM-DD
transactionNumberIndicator	xsd:string	1	Transaction Number Indicator, 0=less than 100,000 / 1=100,000 / 2 = 200,000
transactionDay	xsd:string	2	Transaction Day, DD
transactionNumber	xsd:string	5	Right most 5 digits of transaction #
unitNumber	xsd:string	6	Unit Number, right justified
truckStopCode	xsd:string	5	Truck Stop Code, ST###, ST is the state abbreviation of the truck stop.
truckStopName	xsd:string	15	Truck Stop Name
truckStopCity	xsd:string	12	Truck Stop City
truckStopState	xsd:string	2	Truck Stop State
truckStopInvoiceNumber	xsd:string	8	Truck Stop Invoice Number
transactionTime	xsd:string	4	HHMM
totalAmountDue	xsd:double	6	Total Amount Due
fuelOilFees	xsd:double	4	Fees for fuel and oil and products
cheapFuelAvailabilityFlag	xsd:string	1	Cheaper Fuel Availability Flag, "*" means cheaper fuel was available, blank means it wasn't
serviceUsed	xsd:string	1	Service Used when fueling: F= Full Service, M = mini service, S = self service, B = blended fuel, T= Terminal Fuel, N = Not Applicable, W = Wet Hose
numTractorGallons	xsd:string	5	Number of Tractor Gallons
tractorFuelPricePerGallon	xsd:double	5	Tractor Fuel Price Per Gallon
costOfTractorFuel	xsd:double	5	Cost of Tractor Fuel
numReeferGallons	xsd:string	5	Number of Reefer Gallons

Element Name	Data Type	Max Len	Comment / Example Value
reeferPricePerGallon	xsd:double	5	Reefer Price Per Gallon
costOfReeferFuel	xsd:double	5	Cost of Reefer Fuel
numQuartsOil	xsd:string	2	Number of Quarts of Oil
costOfOil	xsd:string	4	Total Cost of Oil
tractorFuelBillingFlag	xsd:string	1	Tractor Fuel Billing Flag, F=Funded, D=direct bill, T=terminal
reeferFuelBillingFlag	xsd:string	1	Reefer Fuel Billing Flag, F = Funded, D= direct bill
oilBillingFlag	xsd:string	1	Oil Billing Flag, F=Funded, D=direct bill, T=terminal
productGroupCode	xsd:string	3	Product Group Code
cashAdvanceAmount	xsd:double	5	Cash Advance Amount
chargesForCashAdvance	xsd:double	4	Charges for Cash Advance
driverName	xsd:string	12	Driver's Name
tripNumber	xsd:string	10	Trip Number
conversationRate	xsd:string	10	Conversation Rate
hubometerReading	xsd:string	6	Hubometer Reading
yearToDateMPG	xsd:double	4	Year to date MPG
mpgForThisFillUp	xsd:double	4	MPG for this fill up
reeferFuleProductGroupCode	xsd:string	3	Reefer fuel product group code
dieselNum2FuelProductGroupCode	xsd:string	3	Diesel #2 Fuel Product Group Code
productGroupCode2	xsd:string	3	Product Group Code 2
productGroupCode3	xsd:string	3	Product Group Code 3
billableCurrency	xsd:string	1	Billable Currency, U=US, C=Canadian
cardNumber	xsd:string	10	Comchek Card Number
employeeNumber	xsd:string	16	Employee Number
nonFundedItem	xsd:string	1	Non-Funded Item, *=Direct Bill Transaction, T=Terminal Fuel Transaction, or blank
notLimitedNtwkLocationFlag	xsd:string	1	*=Not in Limited Network
productAmount1	xsd:double	7	Product Amount 1
productAmount2	xsd:double	7	Product Amount 2
productAmount3	xsd:double	7	Product Amount 3
allianceSelectOrFocus	xsd:double	5	Alliance Select or Focus – "Rebate Amount"
allianceLocationFlag	xsd:string	1	Y = Alliance Network Location
cashBillingFlag	xsd:string	1	F=Funded, D=direct bill, T= Terminal, or blank
productGroup1BillingFlag	xsd:string	1	F=Funded, D=direct bill, T=Terminal, or blank
productGroup2BillingFlag	xsd:string	1	F=Funded, D=direct bill, T=Terminal, or blank
productGroup3BillingFlag	xsd:string	1	F=Funded, D=direct bill, T=Terminal, or blank
driverLicenseState	xsd:string	2	Driver's License State

Element Name	Data Type	Max Len	Comment / Example Value
driverLicenseNumber	xsd:string	20	Driver's License Number
purchaseOrderNumber	xsd:string	10	Purchase Order Number
trailerNumber	xsd:string	10	Trailer Number
previousHubReading	xsd:string	6	Previous Hub Reading
cancelFlag	xsd:string	1	Y=yes, N=no
dateOfOriginalTransaction	xsd:string	6	Date of original transaction
serviceCenterChainCode	xsd:string	5	Service Center Chain Code
dieselNum1FuelProductGroupCode	xsd:string	5	Diesel #1 Fuel Product Group Code
otherFuelProductGroupCode	xsd:string	3	Other Fuel Product Group Code
rebateIndicator	xsd:string	1	R=rebate, N=net
trailerHubReading	xsd:double	7	Trailer Hub Reading
automatedTransaction	xsd:string	1	Y=yes, N=no
bulkFuelFlag	xsd:string	1	Y=yes, N=no
serviceCenterBridgeTransaction	xsd:string	1	Y=yes, N=no
number1FuelGallons	xsd:double	5	Number 1Fuel-Gallons
number1FuelPPG	Xsd:double	5	Number 1Fuel-PPG
number1FuelCost	Xsd:double	5	Number 1Fuel-Cost
otherFuelGallons	Xsd:double	5	Other Fuel-Gallons
otherFuelPPG	Xsd:double	5	Other Fuel-PPG
otherFuelCost	Xsd:double	5	Other Fuel-Cost
focusOrSelectDiscount	xsd:string	1	F=Focus, S=Select, or blanks
canadianTaxAmountCan	Xsd:double	4	Canadian Tax Amount (Can Dollars)
canadianTaxAmountUS	Xsd:double	4	Canadian Tax Amount (US Dollars)
canadianTaxPaidFlag	Xsd:string	1	Y=yes, N=no
declineFlag	Xsd:string	1	Y for Declined transactions and nullable for processed transactions
declineCode	Xsd:string	5	decline code of declined transactions and nullable for processed transactions
declineMessage	Xsd:string	121	decline description of declined transactions and nullable for processed transactions
latitude	xsd: string	15	Latitude of the merchant
longitude	xsd: string	15	Longitude of the merchant
</PIDTransactionRecord>			
</records>			
responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicate errors
responseDescription	xsd:string	80	Description of the response code
</IntradayResponse>			

Proprietary V02 Intraday

The Proprietary Intraday V02 Request allows customers to retrieve new Proprietary transactions that have occurred since the time of their last request. This allows for review of new transactions without the burden of processing previously retrieved transactions. The response record includes transactions authorized at the point of sale, those that have completed settlement (posted), and declined transactions as well. By default, a transaction will not be included in the response record a second time using this inquiry method. As part of proprietary intraday V02 api, we have removed the card number and added card token field in response.

To access the Proprietary Intraday web service, users must be flagged in iConnectData under the Registration Module for Web Services.

Function:	Proprietary Intraday V02 Request
Web Service Method:	ProprietaryIntradayRequestV02
Applicable Card Type:	Comdata Proprietary Cards (physical & ghost)
Other Notes:	Transactions older than 7 days are purged from the Proprietary Intraday database and will not be available for retrieval by this service.

Request Record – Proprietary Intraday Request V02

<main: ProprietaryIntradayRequestV02>				
<criteria>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
maxRows	xsd:string	N	5	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
startDate	xsd:string	N	10	YYYY-MM-DD Optional field which allows the reselection of transactions older than the most recent retrieval. Note: Use of this field does not adjust the most recently retrieved transaction timestamp.
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); the default is N Masked card numbers appear as follows: 123XXXX123
pageNbr	xsd:string	N	6	Searches can return up to 10,000 records per page (or maxRows). Searches greater than maxRows are divided into pages. Enter a page number greater than 1 to see these additional pages.
</criteria>				
</main: ProprietaryIntradayRequestV02>				

Response Record – Proprietary Intraday Response V02

<main: ProprietaryIntradayResponseV02>			
Element Name	Data Type	Max Len	Comment / Example Value
<pageCount>	xsd: int	6	Total number of pages returned for this search

<main:ProprietaryIntradayResponseV02>			
Element Name	Data Type	Max Len	Comment / Example Value
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<records>			
<PIDTransactionRecordV02>			
accountCode	xsd:string	5	5-digit alphanumeric account code
customerID	xsd:string	5	4- or 5-digit customer ID under which the card was assigned
recordIdentifier	xsd:string	2	Constant "01", C1 if Cancelled
cdnCompanyAccountCode	xsd:string	5	CDN Company Accounting Code
fuelBillingFlag	xsd:string	1	Fuel Billing Flag, B = Balanced Based, L=limit based
expressCashBillingFlag	xsd:string	1	Express Cash Billing Flag, L=load, P=pick-up
transactionDate	xsd:string	10	Transaction Date, YYYY-MM-DD
transactionNumberIndicator	xsd:string	1	Transaction Number Indicator, 0=less than 100,000 / 1=100,000 / 2 = 200,000
transactionDay	xsd:string	2	Transaction Day, DD
transactionNumber	xsd:string	5	Right most 5 digits of transaction #
unitNumber	xsd:string	6	Unit Number, right justified
truckStopCode	xsd:string	5	Truck Stop Code, ST###, ST is the state abbreviation of the truck stop.
truckStopName	xsd:string	15	Truck Stop Name
truckStopCity	xsd:string	12	Truck Stop City
truckStopState	xsd:string	2	Truck Stop State
truckStopInvoiceNumber	xsd:string	8	Truck Stop Invoice Number
transactionTime	xsd:string	4	HHMM
totalAmountDue	xsd:double	6	Total Amount Due
fuelOilFees	xsd:double	4	Fees for fuel and oil and products
cheapFuelAvailabilityFlag	xsd:string	1	Cheaper Fuel Availability Flag, "*" means cheaper fuel was available, blank means it wasn't
serviceUsed	xsd:string	1	Service Used when fueling: F= Full Service, M = mini service, S = self service, B = blended fuel, T= Terminal Fuel, N = Not Applicable, W = Wet Hose
numTractorGallons	xsd:string	5	Number of Tractor Gallons
tractorFuelPricePerGallon	xsd:double	5	Tractor Fuel Price Per Gallon
costOfTractorFuel	xsd:double	5	Cost of Tractor Fuel
numReeferGallons	xsd:string	5	Number of Reefer Gallons
reeferPricePerGallon	xsd:double	5	Reefer Price Per Gallon
costOfReeferFuel	xsd:double	5	Cost of Reefer Fuel

<main:ProprietaryIntradayResponseV02>			
Element Name	Data Type	Max Len	Comment / Example Value
numQuartsOil	xsd:string	2	Number of Quarts of Oil
costOfOil	xsd:string	4	Total Cost of Oil
tractorFuelBillingFlag	xsd:string	1	Tractor Fuel Billing Flag, F=Funded, D=direct bill, T=terminal
reeferFuelBillingFlag	xsd:string	1	Reefer Fuel Billing Flag, F = Funded, D= direct bill
oilBillingFlag	xsd:string	1	Oil Billing Flag, F=Funded, D=direct bill, T=terminal
productGroupCode	xsd:string	3	Product Group Code
cashAdvanceAmount	xsd:double	5	Cash Advance Amount
chargesForCashAdvance	xsd:double	4	Charges for Cash Advance
driverName	xsd:string	12	Driver's Name
tripNumber	xsd:string	10	Trip Number
conversationRate	xsd:string	10	Conversation Rate
hubometerReading	xsd:string	6	Hubometer Reading
yearToDateMPG	xsd:double	4	Year to date MPG
mpgForThisFillUp	xsd:double	4	MPG for this fill up
reeferFuleProductGroupCode	xsd:string	3	Reefer fuel product group code
dieselNum2FuelProductGroupCode	xsd:string	3	Diesel #2 Fuel Product Group Code
productGroupCode2	xsd:string	3	Product Group Code 2
productGroupCode3	xsd:string	3	Product Group Code 3
billableCurrency	xsd:string	1	Billable Currency, U=US, C=Canadian
cardToken	xsd:string	10	Alphanumeric
employeeNumber	xsd:string	16	Employee Number
nonFundedItem	xsd:string	1	Non-Funded Item, *=Direct Bill Transaction, T=Terminal Fuel Transaction, or blank
notLimitedNtwkLocationFlag	xsd:string	1	*=Not in Limited Network
productAmount1	xsd:double	7	Product Amount 1
productAmount2	xsd:double	7	Product Amount 2
productAmount3	xsd:double	7	Product Amount 3
allianceSelectOrFocus	xsd:double	5	Alliance Select or Focus – "Rebate Amount"
allianceLocationFlag	xsd:string	1	Y = Alliance Network Location
cashBillingFlag	xsd:string	1	F=Funded, D=direct bill, T= Terminal, or blank
productGroup1BillingFlag	xsd:string	1	F=Funded, D=direct bill, T=Terminal, or blank
productGroup2BillingFlag	xsd:string	1	F=Funded, D=direct bill, T=Terminal, or blank
productGroup3BillingFlag	xsd:string	1	F=Funded, D=direct bill, T=Terminal, or blank
driverLicenseState	xsd:string	2	Driver's License State

<main:ProprietaryIntradayResponseV02>			
Element Name	Data Type	Max Len	Comment / Example Value
driverLicenseNumber	xsd:string	20	Driver's License Number
purchaseOrderNumber	xsd:string	10	Purchase Order Number
trailerNumber	xsd:string	10	Trailer Number
previousHubReading	xsd:string	6	Previous Hub Reading
cancelFlag	xsd:string	1	Y=yes, N=no
dateOfOriginalTransaction	xsd:string	6	Date of original transaction
serviceCenterChainCode	xsd:string	5	Service Center Chain Code
dieselNum1FuelProductGroupCode	xsd:string	5	Diesel #1 Fuel Product Group Code
otherFuelProductGroupCode	xsd:string	3	Other Fuel Product Group Code
rebateIndicator	xsd:string	1	R=rebate, N=net
trailerHubReading	xsd:double	7	Trailer Hub Reading
automatedTransaction	xsd:string	1	Y=yes, N=no
bulkFuelFlag	xsd:string	1	Y=yes, N=no
serviceCenterBridgeTransaction	xsd:string	1	Y=yes, N=no
number1FuelGallons	xsd:double	5	Number 1Fuel-Gallons
number1FuelPPG	Xsd:double	5	Number 1Fuel-PPG
number1FuelCost	Xsd:double	5	Number 1Fuel-Cost
otherFuelGallons	Xsd:double	5	Other Fuel-Gallons
otherFuelPPG	Xsd:double	5	Other Fuel-PPG
otherFuelCost	Xsd:double	5	Other Fuel-Cost
focusOrSelectDiscount	xsd:string	1	F=Focus, S=Select, or blanks
canadianTaxAmountCan	Xsd:double	4	Canadian Tax Amount (Can Dollars)
canadianTaxAmountUS	Xsd:double	4	Canadian Tax Amount (US Dollars)
canadianTaxPaidFlag	Xsd:string	1	Y=yes, N=no
declineFlag	Xsd:string	1	Y for Declined transactions and nullable for processed transactions
declineCode	Xsd:string	5	decline code of declined transactions and nullable for processed transactions
declineMessage	Xsd:string	121	decline description of declined transactions and nullable for processed transactions
latitude	xsd: string	15	Latitude of the merchant
longitude	xsd: string	15	Longitude of the merchant
</PIDTransactionRecordV02>			
</records>			
responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicate errors
responseDescription	xsd:string	80	Description of the response code
</ ProprietaryIntradayResponseV02>			

Intraday V03 - MasterCard

The MasterCard Intraday Request allows customers to retrieve new MasterCard transactions that have occurred since the time of their last request. This allows for review of new transactions without the burden of processing previously retrieved transactions. The response record includes transactions authorized at the point of sale (POS), declines at the POS, settlements (posted) and credits.

Function:	MasterCard Intraday V03
Web Service Method:	Intraday V03
Applicable Card Type:	Comdata Mastercards (physical & ghost) Comdata Virtual MasterCards
Other Notes:	This service is not intended to be an alternative delivery method for the batch reconciliation files (AC29/AC30) which contain full details for settled transactions. It is intended to be used as notification of transaction events (authorizations, declines, posting, credits) and associated key data elements. Transactions older than 7 days are purged from the Intraday database and will not be available for retrieval by this service. Internal Comdata note: To access the MasterCard Interday web service, users must be flagged in iConnectData under the Registration module for Web Services.

Request Record

<main: IntradayRequestV03>				
<criteria>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
maxRows	xsd:string	N	5	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
startDate	xsd:string	N	10	YYYY-MM-DD Optional field which allows the reselection of transactions older than the most recent retrieval. *Note: Use of this field does not adjust the most recently retrieved transaction timestamp.
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); the default is N Masked card numbers appear as follows: 123456XXXXXX1234
pageNbr	xsd:string	N	6	Searches can return up to 10,000 records per page (or maxRows). Searches greater than maxRows are divided into pages. Enter a page number greater than 1 to see these additional pages.

detailType	xsd:string	N	2	*Note: Product Details is a future feature that is not fully available yet. PD = Product Details level data will be provided. If blank then only regular MasterCard Intraday fields will be returned.
</criteria>				
</main: IntradayRequestV03>				

Response Record

<main: IntradayResponseV03>			
Element Name	Data Type	Max Len	Comment / Example Value
<pageCount>	xsd: int	6	Total number of pages returned for this search
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<records>			
<IDTransactionRecord>			
accountCode	xsd:string	5	5-digit alphanumeric account code
customerID	xsd:string	5	4- or 5-digit customer ID under which the card was assigned
customerName	xsd:string	30	Name associated with the account
corporateCode	xsd:string	14	Alphanumeric. This field will be blank unless the account falls under a corporate ID.
transactionDate	xsd:string	10	YYYY-MM-DD If the transaction has posted, this information matches the Posted Date field
transactionTime	xsd:string	8	HH:MM:SS H = hour between 1 and 23; m = minutes; s = seconds
postedDate	xsd:string	10	YYYY-MM-DD *Note: Posting only field
postedTime	xsd:string	8	HH:MM:SS H = hour between 1 and 23; m = minutes; s = seconds *Note: Posting only field
transactionType	xsd:string	10	• Authorized • Posted • Declined • Credit

<main: IntradayResponseV03>									
Element Name	Data Type	Max Len	Comment / Example Value						
cardNumber	xsd:string	16	16-digit card number (number masked if maskCardFlag flagged "Y" in the request; for example, "999999XXXXX9999")						
cardholderName	xsd:string	30	Name associated with the card; first name followed by last name						
cardExpireDate	xsd:string	4	4-digit card expiration date in MMY format						
declineCode	xsd:string	5	Numeric (0-9). Code for a declined transaction.						
declineMessage	xsd:string	60	Message explaining the decline code, if applicable						
correctiveAction	xsd:string	90	Message describing the suggested action in response to the decline code						
promptedID	xsd:string	16	≤ 16-digit ID number that can authorize a transaction or show what is entered at the POS (like a PIN)						
mccGroup	xsd:string	5	Merchant Category Code group						
mccNumber	xsd:string	4	4-digit Merchant Category Code for the merchant receiving the payment						
mccDescription	xsd:string	70	Message identifying the MCC						
merchantName	xsd:string	50	The merchant receiving the card payment						
merchantAddress	xsd:string	50	Physical street address for the merchant						
merchantCity	xsd:string	50	City for the merchant						
merchantState	xsd:string	3	State/province for the merchant						
merchantZIP	xsd:string	10	Postal code for the merchant						
acceptLocation	xsd:string	40	Merchant information from their POS device						
preAuthAmount	xsd:string	15	If the authorized amount is a credit, the value will be preceded by a minus sign (for example, -26.31)						
postedAmount	xsd:string	15	The amount in US dollars and cents posted in the transaction (for example, 26.31) *Note: Posting only field						
approvalCode	xsd:string	10	Authorization number given for the transaction						
reversalFlag	xsd:string	1	Y (Yes) or N (No) Indicates if the transaction is an authorization reversal.						
cardToken	xsd:string	10	Alphanumeric						
surcharge	xsd:string	9	Surcharge amount						
posEModeDesc	xsd:string	30	The point of sale entry mode description: <table><tr><td>UNKNOWN</td></tr><tr><td>KEYED TRANSACTION</td></tr><tr><td>SWIPED TRX. ON OUTDATED POS</td></tr><tr><td>SWIPED TRX. VIA OCR</td></tr><tr><td>SWIPED TRX. VIA CHIP</td></tr><tr><td>MANUAL ENTRY OF CHIP CARD</td></tr></table>	UNKNOWN	KEYED TRANSACTION	SWIPED TRX. ON OUTDATED POS	SWIPED TRX. VIA OCR	SWIPED TRX. VIA CHIP	MANUAL ENTRY OF CHIP CARD
UNKNOWN									
KEYED TRANSACTION									
SWIPED TRX. ON OUTDATED POS									
SWIPED TRX. VIA OCR									
SWIPED TRX. VIA CHIP									
MANUAL ENTRY OF CHIP CARD									

<main: IntradayResponseV03>			
Element Name	Data Type	Max Len	Comment / Example Value
			CHIP CRD DEFAULT TO MAG STRIPE
			ECOMMERCE
			SWIPED TRANSACTION
			COMDATA MANUAL AUTHORIZATION
idMatchNumber	xsd:string	10	Transaction ID match used to cross reference authorization records, posted records and reconciliation data (AC files)
employeeNumber	xsd:string	16	Employee number assigned to Card
VINNumber	xsd:string	30	VIN # *Note: Future field not fully available yet.
POSFirstName	xsd:string	15	POS First Name *Note: Future field not fully available yet.
POSLastName	xsd:string	20	POS Last Name *Note: Future field not fully available yet.
merchantAddress2	xsd:string	40	Vendor Address 2 *Note: Future field not fully available yet.
misc1	xsd:string	15	Misc 1 *Note: Future field not fully available yet.
misc2	xsd:string	15	Misc 2 *Note: Future field not fully available yet.
transactionFees	xsd:double	8	Transaction Fees *Note: Future field not fully available yet.
vehicleNumber	xsd:string	10	Vehicle Number
latitude	xsd:string	15	Latitude of the merchant
longitude	xsd:string	15	Longitude of the merchant
<ProductDetail>			
transactionIdentifier	xsd:string	7	Transaction Identifier
productCode	xsd:string	15	Product Code
productTypeCode	xsd:string	1	Product Type Code
productDescription	xsd:string	35	Product Description
productQuantity	xsd:double	12	Issue Quantity, AC file lists it as productQuantity
creditOrDebit	xsd:string	1	Credit or Debit – C or D
grossCostPrice	xsd:double	10	Gross Cost Price
basePricePerUnit	xsd:double	5	Base Price Per Unit
productPrice	xsd:double	10	Product Price - Net Due
productTotalCost	xsd:double	9	Product Total Cost - Net Due
taxAmount1	xsd:double	9	Tax Amount 1
taxRate1	xsd:double	5	Tax Rate 1
taxId1	xsd:string	3	Tax ID 1
taxAmount2	xsd:double	9	Tax Amount 2

<main: IntradayResponseV03>			
Element Name	Data Type	Max Len	Comment / Example Value
taxRate2	xsd:double	5	Tax Rate 2
taxId2	xsd:string	3	Tax ID 2
taxAmount3	xsd:double	9	Tax Amount 3
taxRate3	xsd:double	5	Tax Rate 3
taxId3	xsd:string	3	Tax ID 3
merchantDiscountIndicator	xsd:string	1	Merchant Discount Indicator
merchantDiscountAmountNet	xsd:double	9	Merchant Discount amount Net
rebateIndicator	xsd:string	1	Rebate Indicator
rebateAmountNet	xsd:double	9	Rebate amount Net
unitOfMeasure	xsd:string	1	Unit Of Measure
odometerReading	xsd:double	7	Odometer Reading
</ProductDetail>			
<IDTransactionRecord>			
</records>			
responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicate errors
responseDescription	xsd:string	80	Description of the response code
</IntradayResponseV03>			

Intraday V04 - MasterCard

The MasterCard Intraday Request allows customers to retrieve new MasterCard transactions that have occurred since the time of their last request. This allows for review of new transactions without the burden of processing previously retrieved transactions. The response record includes transactions authorized at the point of sale (POS), declines at the POS, settlements (posted) and credits. As part of intraday V04 api, we have removed the card number and added card token and misc3 fields in response.

Function:	MasterCard Intraday V04
Web Service Method:	Intraday V04
Applicable Card Type:	Comdata Mastercards (physical & ghost) Comdata Virtual MasterCards
Other Notes:	This service is not intended to be an alternative delivery method for the batch reconciliation files (AC29/AC30) which contain full details for settled transactions. It is intended to be used as notification of transaction events (authorizations, declines, posting, credits) and associated key data elements. Transactions older than 7 days are purged from the Intraday database and will not be available for retrieval by this service. Internal Comdata note: To access the MasterCard Interday web service, users must be flagged in iConnectData under the Registration module for Web Services.

Request Record

<main: IntradayRequestV04>				
<criteria>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
maxRows	xsd:string	N	5	Number of rows to display per page; values between 1 and 10,000; the default is 10,000
startDate	xsd:string	N	10	YYYY-MM-DD Optional field which allows the reselection of transactions older than the most recent retrieval. *Note: Use of this field does not adjust the most recently retrieved transaction timestamp.
maskCardFlag	xsd:string	N	1	Y (yes) or N (no); the default is N Masked card numbers appear as follows: 123456XXXXXX1234
pageNbr	xsd:string	N	6	Searches can return up to 10,000 records per page (or maxRows). Searches greater than maxRows are divided into pages. Enter a page number greater than 1 to see these additional pages.

detailType	xsd:string	N	2	*Note: Product Details is a future feature that is not fully available yet. PD = Product Details level data will be provided. If blank then only regular MasterCard Intraday fields will be returned.
</criteria>				
</main: IntradayRequestV04>				

Response Record

<main: IntradayResponseV04>			
Element Name	Data Type	Max Len	Comment / Example Value
<pageCount>	xsd: int	6	Total number of pages returned for this search
<pageNbr>	xsd: int	6	Current page number displayed
<recordCount>	xsd: int	5	Number of records on the page; up to 10,000 records per page
<records>			
<IDTransactionRecordV04>			
accountCode	xsd:string	5	5-digit alphanumeric account code
customerID	xsd:string	5	4- or 5-digit customer ID under which the card was assigned
customerName	xsd:string	30	Name associated with the account
corporateCode	xsd:string	14	Alphanumeric. This field will be blank unless the account falls under a corporate ID.
transactionDate	xsd:string	10	YYYY-MM-DD If the transaction has posted, this information matches the Posted Date field
transactionTime	xsd:string	8	HH:MM:SS H = hour between 1 and 23; m = minutes; s = seconds
postedDate	xsd:string	10	YYYY-MM-DD *Note: Posting only field
postedTime	xsd:string	8	HH:MM:SS H = hour between 1 and 23; m = minutes; s = seconds *Note: Posting only field
transactionType	xsd:string	10	• Authorized • Posted • Declined • Credit

<main: IntradayResponseV04>											
Element Name	Data Type	Max Len	Comment / Example Value								
cardholderName	xsd:string	30	Name associated with the card; first name followed by last name								
cardExpireDate	xsd:string	4	4-digit card expiration date in MMY format								
declineCode	xsd:string	5	Numeric (0-9). Code for a declined transaction.								
declineMessage	xsd:string	60	Message explaining the decline code, if applicable								
correctiveAction	xsd:string	90	Message describing the suggested action in response to the decline code								
promptedID	xsd:string	16	≤ 16-digit ID number that can authorize a transaction or show what is entered at the POS (like a PIN)								
mccGroup	xsd:string	5	Merchant Category Code group								
mccNumber	xsd:string	4	4-digit Merchant Category Code for the merchant receiving the payment								
mccDescription	xsd:string	70	Message identifying the MCC								
merchantName	xsd:string	50	The merchant receiving the card payment								
merchantAddress	xsd:string	50	Physical street address for the merchant								
merchantCity	xsd:string	50	City for the merchant								
merchantState	xsd:string	3	State/province for the merchant								
merchantZIP	xsd:string	10	Postal code for the merchant								
acceptLocation	xsd:string	40	Merchant information from their POS device								
preAuthAmount	xsd:string	15	If the authorized amount is a credit, the value will be preceded by a minus sign (for example, -26.31)								
postedAmount	xsd:string	15	The amount in US dollars and cents posted in the transaction (for example, 26.31) *Note: Posting only field								
approvalCode	xsd:string	10	Authorization number given for the transaction								
reversalFlag	xsd:string	1	Y (Yes) or N (No) Indicates if the transaction is an authorization reversal.								
cardToken	xsd:string	10	Alphanumeric								
surcharge	xsd:string	9	Surcharge amount								
posEModeDesc	xsd:string	30	The point of sale entry mode description:<table><tr><td>UNKNOWN</td></tr><tr><td>KEYED TRANSACTION</td></tr><tr><td>SWIPED TRX. ON OUTDATED POS</td></tr><tr><td>SWIPED TRX. VIA OCR</td></tr><tr><td>SWIPED TRX. VIA CHIP</td></tr><tr><td>MANUAL ENTRY OF CHIP CARD</td></tr><tr><td>CHIP CRD DEFAULT TO MAG STRIPE</td></tr><tr><td>ECOMMERCE</td></tr></table>	UNKNOWN	KEYED TRANSACTION	SWIPED TRX. ON OUTDATED POS	SWIPED TRX. VIA OCR	SWIPED TRX. VIA CHIP	MANUAL ENTRY OF CHIP CARD	CHIP CRD DEFAULT TO MAG STRIPE	ECOMMERCE
UNKNOWN											
KEYED TRANSACTION											
SWIPED TRX. ON OUTDATED POS											
SWIPED TRX. VIA OCR											
SWIPED TRX. VIA CHIP											
MANUAL ENTRY OF CHIP CARD											
CHIP CRD DEFAULT TO MAG STRIPE											
ECOMMERCE											

<main: IntradayResponseV04>			
Element Name	Data Type	Max Len	Comment / Example Value
			SWIPED TRANSACTION
			COMDATA MANUAL AUTHORIZATION
idMatchNumber	xsd:string	10	Transaction ID match used to cross reference authorization records, posted records and reconciliation data (AC files)
employeeNumber	xsd:string	16	Employee number assigned to Card
VINNumber	xsd:string	30	VIN Number
POSFirstName	xsd:string	15	POS First Name
POSLastName	xsd:string	20	POS Last Name
merchantAddress2	xsd:string	40	Vendor Address 2 *Note: Future field not fully available yet.
misc1	xsd:string	15	Misc 1
misc2	xsd:string	15	Misc 2
Misc3	xsd:string	15	Misc 3
transactionFees	xsd:double	8	Transaction Fees *Note: Future field not fully available yet.
vehicleNumber	xsd:string	10	Vehicle Number
latitude	xsd:string	15	Latitude of the merchant
longitude	xsd:string	15	Longitude of the merchant
<ProductDetail>			
transactionIdentifier	xsd:string	7	Transaction Identifier
productCode	xsd:string	15	Product Code
productTypeCode	xsd:string	1	Product Type Code
productDescription	xsd:string	35	Product Description
productQuantity	xsd:double	12	Issue Quantity, AC file lists it as productQuantity
creditOrDebit	xsd:string	1	Credit or Debit – C or D
grossCostPrice	xsd:double	10	Gross Cost Price
basePricePerUnit	xsd:double	5	Base Price Per Unit
productPrice	xsd:double	10	Product Price - Net Due
productTotalCost	xsd:double	9	Product Total Cost - Net Due
taxAmount1	xsd:double	9	Tax Amount 1
taxRate1	xsd:double	5	Tax Rate 1
taxId1	xsd:string	3	Tax ID 1
taxAmount2	xsd:double	9	Tax Amount 2
taxRate2	xsd:double	5	Tax Rate 2
taxId2	xsd:string	3	Tax ID 2
taxAmount3	xsd:double	9	Tax Amount 3

<main: IntradayResponseV04>			
Element Name	Data Type	Max Len	Comment / Example Value
taxRate3	xsd:double	5	Tax Rate 3
taxId3	xsd:string	3	Tax ID 3
merchantDiscountIndicator	xsd:string	1	Merchant Discount Indicator
merchantDiscountAmountNet	xsd:double	9	Merchant Discount amount Net
rebateIndicator	xsd:string	1	Rebate Indicator
rebateAmountNet	xsd:double	9	Rebate amount Net
unitOfMeasure	xsd:string	1	Unit Of Measure
odometerReading	xsd:double	7	Odometer Reading
</ProductDetail>			
</IDTransactionRecordV04>			
</records>			
responseCode	xsd:string	5	Response code 0 indicates a successful request; all other response codes indicate errors
responseDescription	xsd:string	80	Description of the response code
</IntradayResponseV04>			

Factoring UserSignUp

In the factoring API, user signup verifies identity and eligibility, then creates or confirms the user profile for card onboarding.

After validation, the flow continues to card registration and returns a standard response with request ID, status code, and message.

Function:	factoringUserSignUp
Web Service Method:	factoringUserSignUp
Applicable Card Type:	Applicable for Bridge Haul
Other Notes:	

Request Record –

<UserSignUpRequest>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
userId	xsd: string	Y	18	User's unique identifier
firstName	xsd: string	Y	30	User's first name
lastName	xsd:string	Y	35	User's last name
phoneNumber	xsd:string	Y	10	User's phone number
emailAddress	xsd:string	Y	50	User's email address
deviceId	xsd:string	Y	50	DeviceId they are trying to signUp
</UserSignUpRequest>				

Response Record –

Element Name	Data Type	Max Len	Comment / Example Value
requestUid	xsd: string	40	Unique identifier of the request – value will be conditionally available
responseCode	xsd:string	6	000000. will appear only in success scenario
responseDescription	xsd:string	80	Success Description of the response code other than success will get error description
messageCode	xsd:string	6	Will appear in error case other than 000000
message	xsd:string	80	Description of error code - Will appear in error cases other than 000000

Register Factoring Card

In this 'factoring' API, users can perform CIP and register a card

This API performs CIP verification first and then goes for performing registering card for the specified user.

Function:	registerFactoringCard
Web Service Method:	registerFactoringCard
Applicable Card Type:	Applicable for Bridge Haul
Other Notes:	

Request Record –

<RegisterFactoringCardRequest>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
userId	xsd: string	Y	18	User's unique identifier ex: FACTTEST012
firstName	xsd: string	Y	30	User's first name ex: FACT
lastName	xsd:string	Y	35	User's last name ex: TEST
ssn	xsd:string	Y	9	Social Security Number ex: 45634
dateOfBirth	xsd:string	Y	10	Date in MM/DD/YYYY format ex: 08/25/1984
streetAddress1	xsd:string	Y	50	Street address line 1 ex: 2893 Lakecrest Dr
streetAddress2	xsd:string	N	50	Street address line 2 (apartment - suite)
city	xsd:string	Y	30	City name: Ex: LITTLE ELM
state	xsd:string	Y	2	State/Province code (e.g., "CA", "NY")
zip	xsd:string	Y	10	Postal code (e.g., "12345", "12345-6789")
country	xsd:string	Y	2	Country code (e.g., "US", "CA")
countryOfIssuance	xsd:string	N		

nickname	xsd:string	Y	50	User-friendly card nickname ex:NICKY
employeeId	xsd:string	Y	20	Employee ID ex: EMP9959
cardNumber	xsd:string	Y	16	card number ex: 16-digit card number 5567362200249 Xxx
expDate	xsd:string	Y	6	Card expiration date in MMYYYY format ex: 032029
secCode	xsd:string	Y	3	Card security ex:232
payrollSettlement	xsd:string	N	1	"P" or "S" for payroll/settleme nt
deviceId	xsd:string	Y	50	DeviceId they are trying to register card ex:device213
</RegisterFactoringCardRequest >				

Response Record

Element Name	Data Type	Max Len	Comment / Example Value
requestUid	xsd: string	40	Unique identifier to inquire the status of the request. Value will be populated conditionally
responseCode	xsd:string	6	000000=Success!, 004101 – register card is success but user is pending cip verification
responseDescription	xsd:string	80	Description of the response code other than success will get error description
messageCode	xsd:string	6	Will appear in error cases other than 000000 and 004101
message	xsd:string	80	Description of error code
acctNbr	xsd:string	14	Account Code ex: FC923. Will appear in Success cases
custId	xsd:string	10	Customer Id ex: DCDV4. Will appear in Success cases

BalanceToCreditTransfer

In the factoring API, to initiate a balance-to-credit transfer. This API serves as the middleware between Bridgehaul and the Mainframe webservice. A driver user will be able to use the funds on the balance side of their card to pay down the credit utilization on the same card.

After validation, the flow continues to balance to credit and returns a standard response with request ID, status code, and message.

Function:	balanceToCreditTransfer
Web Service Method:	balanceToCreditTransfer
Applicable Card Type:	Applicable for Bridge Haul
Other Notes:	

Request Record – BALANCE TO CREDIT TRANSFER

<BalanceToCreditTransferRequest>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
cardToken	xsd: string	Y	10	Card token
<u>custId</u>	xsd: string	Y	5	Customer ID
transferAmount	<i>xsd:decimal</i>	Y	35	Transfer amount
</BalanceToCreditTransferRequest >				

Response Record – BALANCE TO CREDIT TRANSFER

<BalanceToCreditTransferResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
confirmationNumber	xsd: string	40	Description of the response code
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	Description of the response code
</BalanceToCreditTransferResponse>			

Factoring User Dashboard

This factoring API provides the requester info for the home dashboard. Current information includes the userid's card balance and the last three transactions on the card within the last 90 days.

Function:	factoringUserDashboard
Web Service Method:	factoringUserDashboard
Applicable Card Type:	Applicable for Bridge Haul
Other Notes:	

Request Record – FACTORING USER DASHBOARD

< FactoringUserDashboardRequest>				
Element Name	Data Type	Req	Max Len	Comment/ Example Value
userId	xsd: string	Y	18	User ID
</ FactoringUserDashboardRequest >				

Response Record – FACTORING USER DASHBOARD

< FactoringUserDashboardResponse>			
Element Name	Data Type	Max Len	Comment / Example Value
requestUid	xsd: string	40	Unique identifier of the request – value will be conditionally available
responseCode	xsd:string	6	000000. will appear only in success scenario
responseMessage	xsd:string	80	Success Description of the response code other than success will get error description
messageCode	xsd:string	6	Will appear in error cases other then 000000
message	xsd:string	80	Will appear in error scenarios, description of error code
balance	xsd:string	8	99999.99
cardStatus	xsd:string	1	A = Active, B = Blocked, anything else consider blocked
<transactions>			
<transaction>			
custName	xsd: string	30	Customer name setup for the cust ID
transDate	xsd:string	10	MM/DD/YYYY
transTime	xsd:string	6	HH:MM:SS
transAmount	xsd:string	8	99999.99
transFee	xsd:string	8	99999.99
transType	xsd:string	14	Transaction Type/ P2P Transfer
transAdjBalance	xsd:string	8	99999.99
udfLabel1	xsd:string	50	UDF Label1
udfField1	xsd:string	50	UDF Field1
udfVisibility1	xsd:string	50	UDF Visibility1
udfLabel2	xsd:string	50	UDF Label1

udfField2	xsd:string	50	UDF Field2
udfVisibility2	xsd:string	50	UDF Visibility2
udfLabel3	xsd:string	50	UDF Label3
udfField3	xsd:string	50	UDF Field3
udfVisibility3	xsd:string	50	UDF Visibility3
</transaction>			
</transactions>			
</ FactoringUserDashboardResponse >			

Factoring User Card Status

This factoring API provides the requester's card status details for all eligible cards linked to the user.

Function	factoringUserCardStatus
Web Service Method:	factoringUserCardStatus
Applicable Card Type:	Applicable for Bridge Haul
Other Notes:	

Request Record-FACTORING USER CARD STATUS

Element Name	Data Type	Req	Max Len	Comment/ Example Value
userId	xsd: string	Y	18	User ID (FACTREC1)
deviceId	xsd: string	Y		Device Identifier(DEV-QA012)

Response Record - FACTORING USER CARD STATUS

Element Name	Data Type	Max Len	Comment / Example Value
requestUid	xsd:string	40	Unique identifier of the request
responseCode	xsd:string	6	000000.will appear only in success scenario
responseMessage	xsd:string	80	Success Description of the response code other than success will get error description
messageCode	xsd:string	6	Will appear in error cases other then 000000
message	xsd:string	80	Will appear in error scenarios, description of error code
<card>			
nickName	xsd: string		Card nickname
cardNumber	xsd:string		Masked card number as returned by service
cardType	xsd:string		Card type
cardStatus	xsd:string		Card status
cardBalance	xsd:string		Card balance

favoriteCard	xsd:string		Y/N flag
primaryCard	xsd:string		Y/N flag
accountCode	xsd:string		Account code
custID	xsd:string		Customer ID
altFundingFlag	xsd:string		Alternate funding flag
cardToken	xsd:string		Tokenized card reference
cardProdType	xsd:string		Card product type
autoLockCustEnroll Status	xsd:string		Auto lock enrollment status
eicConsentFlg	xsd:string		EIC consent flag
corpCode	xsd:string		Corporate code
corpName	xsd:string		Corporate name
autoLockCustUnLock Duration	xsd:string		Unlock duration
autoLockLastUpdateDate	xsd:string		Last update date
autoLockLastUpdateTime	xsd:string		Last update time
remainingUnlockTime	xsd:string		Remaining unlock time
autoLockCardLockStatus	xsd:string		Current auto lock status
balance	xsd:string		Current balance
availableLimit	xsd:string		Available limit
cipStatus	xsd:string		CIP status
</card >			

Validate Factoring Card

This factoring API validates whether the provided card details are eligible and valid for factoring card operations.

Function:	validateFactoringCard
Web Service Method:	validateFactoringCard
Applicable Card Type:	Applicable for Bridge Haul
Other Notes:	

Request Record - VALIDATE FACTORING CARD

Element Name	Data Type	Req	Max Len	Comment/ Example Value
userId	xsd:string	Y		User ID (PARTH12)

cardNumber	xsd:string	Y	16	Must be numeric and exactly 16 digits
securityCode	xsd:string	Y	3	Card security code (277)
expDate	xsd:string	Y	6	Card expiration date(032029)
employeeId	xsd:string	N		Employee ID (optional)(EMP9074)

Response Record - VALIDATE FACTORING CARD

Element Name	Data Type	Max Len	Comment / Example Value
requestUid	xsd:string	40	Unique identifier of the request
responseCode	xsd:string	6	000000.will appear only in success scenario
responseMessage	xsd:string	80	Success Description of the response code other than success will get error description
messageCode	xsd:string	6	Will appear in error cases other then 000000
message	xsd:string	80	Will appear in error scenarios, description of error code

Move Card

The Move Card request is used to move a card from one customer to another customer via a web service mirroring PS14 functionality. The Move Card request requires the following information: the requested card limit, card expiration date, and the card status.

Function:	Move Card
Web Service Method:	moveCard
Applicable Card Type	
Other Notes:	

Request Record – Move Card

Element Name	Data Type	Req	Max Len	Comment / Example Value
< MoveCardRequest>				
fromCustomerId	xsd:string	Y	5	Value assigned by Comdata
moveToCustomerId	xsd:string	Y	5	Value assigned by Comdata. (4-digit Customer IDs will include a leading zero.)
cardIdentifierType	xsd:string	Y	1	cardIdentifierType should be required and below values only valid. (C , E , T) C → Card Number E → Employee Number T → Card Token
cardIdentifier	xsd:long	Y	16	cardIdentifier value needs to enter based on cardIdentifierType field value. IF cardIdentifierType C → Card Number

				IF cardIdentifierType E → Employee Number IF cardIdentifierType T → Card Token
</ MoveCardRequest >				

Response – Move Card

<MoveCardResponse >			
Element Name	Data Type	Max Len	Comment / Example Value
responseCode	xsd:string	5	0=Success Anything Else=Error
responseDescription	xsd:string	80	If the request succeeded, the message should be: CARD MOVED
</MoveCardResponse>			

Appendix A. - Comdata Web Services 2.1 Sample Request/Response

Comdata Web Services 2.1 - Sample Request (Raw Version)

```
<soapenv:Envelope xmlns:main="http://fleetCredit.comdata.com/maintenance/"
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header>
    <wsse:Security soapenv:mustUnderstand="1" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken wsu:Id="UsernameToken-12" xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
        <wsse:Username>XXXXXXX</wsse:Username>
        <wsse:Password Type="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-username-token-profile-1.0#PasswordText">*****</wsse:Password>
        <wsse:Nonce EncodingType="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-soap-message-security-1.0#Base64Binary">+3c86gEtyd0XmvHUUGTFhQ==</wsse:Nonce>
        <wsu:Created>2012-06-20T18:59:01.034Z</wsu:Created>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <main:UpdateCardRequest>
      <empNumCardNumFlag>C</empNumCardNumFlag>
      <empNumCardNumValue>XXXXXXXXXXXX2628</empNumCardNumValue>
      <cardDetails>
        <accountCode>XG594</accountCode>
        <customerId>89782</customerId>
        <discretionaryData xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <trackingNumber xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <cardStatus>A</cardStatus>
        <profileFlag xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <profileValue xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <profileDescription xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <cardFirstName xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <cardLastName xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <driverLicenseNumber xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
        <driverLicenseState xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
      </cardDetails>
    </main:UpdateCardRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

```

<tripNumber xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<vehicleNumber xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<employeeNumber xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<vehicleVINNumber xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<vehicleDescription xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<vehicleLicensePlateNumber xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<registrationExpiration xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<miscellaneous1 xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<miscellaneous2 xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<cardExpiration xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
</cardDetails>
<mailingDetails xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<maskCardFlag xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
</main:UpdateCardRequest>
</soapenv:Body>
</soapenv:Envelope>

```

Comdata Web Services 2.1 - Sample Response (Raw Version)

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p698:UpdateCardResponse xmlns:p698="http://fleetCredit.comdata.com/maintenance/">
      <response>
        <accountCode>XG594</accountCode>
        <customerId>89782</customerId>
        <discretionaryData xsi:nil="true"/>
        <trackingNumber xsi:nil="true"/>
        <cardNumber>XXXXXXXXXXXX2628</cardNumber>
        <employeeNumber>9876</employeeNumber>
        <responseCode>00000</responseCode>
        <responseDescription>UPDATE COMPLETED</responseDescription>
      </response>
    </p698:UpdateCardResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

Notes:

1. The namespace used in the sample request is simply illustrative of how the customer may choose to utilize a namespace.
2. Carriage returns, tabs, and spacing have been inserted in both the sample request and response to improve readability.
3. The preceding sample request and response were captured utilizing soapUI Pro 3.6.1.

Appendix B. – Possible Card Block Reason Codes and Descriptions

Possible card block reason codes and their descriptions can display in the CardBlockReasonCode and cardBlockReasonDesc fields.

cardBlockReasonCode	cardBlockReasonDesc
1	Comdata Automated Block - Unknown Reason
2	Comdata Internal - Payee Opt Out
3	Comdata Automated Block - Net Credit Remaining Rule
4	Comdata Automated Block - Force Post - Under Card Rule

5	Payment Limit Cap
6	Overpayment
7	Partial Payment
8	Online Only
9	Security
10	Advisory Details Not Matching
11	Threshold
56	VP Prefund Block
57	VP Auto Block
100	CR - Payee Opt Out
101	CR - Incorrect Payee
102	CR - Void Card
103	CR - Duplicate Payment
104	CR - Payment Reissued
200	Vehicle Out of Service
201	New Vehicle
203	Vehicle Sold
204	Vehicle Transferred
205	Temporary Vehicle
300	Card Damaged
400	New Cardholder
401	Cardholder Transfer
402	Cardholder Leave
403	Cardholder Vacation
404	Cardholder Termed
405	Cardholder Out of Service
9000	Expired Card Block